ENGLISH

Canon

DIGITAL
IXUS i7
zoom

Before Using the Camera
Shooting
Playback/Erasing
Print/Transfer Settings
Viewing Images on a TV set
Customizing the Camera
Troubleshooting
List of Messages
Appendix

Advanced Camera User Guide

This guide explains camera features and procedures in detail.

DiG!C III PictBridge DIRECT PRINT BUBBLE JET DIRECT Exif Print DPOF HI-SPEED CERTIFIED USB

Downloaded From camera-usermanual.com Canon Manuals

Main Features

Shooting

- Automatically adjusts shooting settings to match particular conditions (Scene mode)
- Vertical shooting function (Vertical Shutter Release)
- Avoid the effects of camera shake or blurry subjects when shooting by using high ISO speed
- Automatically detects camera orientation with an Intelligent Orientation sensor
- Changes image colors to create special effects (Color Accent, Color Swap)

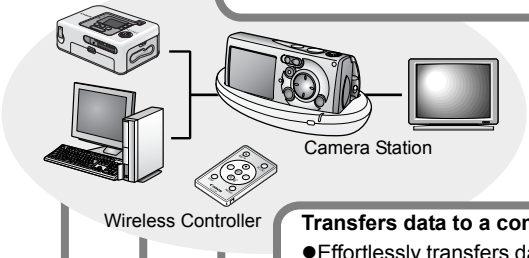

Transfers data to a computer

- Effortlessly transfers data with the Print/Share button.

Playback

- Organizes Images by Category
- Plays movies with sound
- Auto plays slideshows

Editing

- Adds effects to still images with the My Colors function
- Records sound memos for still images
- Edits movies

Printing

- Makes printing easy with the Print/Share button
- Also supports non-Canon brand *PictBridge* compliant printers

Downloaded from Camera-Manuals.com Canon Manuals

Conventions Used in this Guide

Icons appearing below titles indicate the modes in which the procedure can be used.

See *Functions Available in Each Shooting Mode* (p. 138).

In this guide, the *Basic Camera User Guide* is referred to as the *Basic Guide*, and the *Advanced Camera User Guide* is referred to as the *Advanced Guide*.

This mark denotes issues that may affect the camera's operation.

This mark denotes additional topics that complement the basic operating procedures.

You can use SD memory cards, SDHC memory cards and MultiMediaCards with this camera. These cards are collectively called memory cards in this guide.

Use of genuine Canon accessories is recommended.

This product is designed to achieve excellent performance when used with genuine Canon accessories. Canon shall not be liable for any damage to this product and/or accidents such as fire, etc., caused by the malfunction of non-genuine Canon accessories (e.g., a leakage and/or explosion of a battery pack). Please note that this warranty does not apply to repairs arising out of the malfunction of non-genuine Canon accessories, although you may request such repairs on a chargeable basis.

Downloaded From camera-usermanual.com Canon Manuals

Table of Contents

Items marked with a ☆ are lists or charts that summarize camera functions or procedures.

Conventions Used in this Guide 1

Handling Precautions 5

Please Read 5
Safety Precautions 6
Preventing Malfunctions 11

Before Using the Camera—Basic Operations 12

Using the LCD Monitor 12
LCD Monitor Brightness (Night Display Function) 13
Information Displayed on the LCD Monitor 14
Power Saving Function 19
Setting the World Clock 20
☆ Menus and Settings 22
☆ Menu List 24
Resetting Settings to Their Default Values 28
Formatting Memory Cards 29

Shooting 30

Changing the Recording Pixels and Compression (Still Images) 30
Red-Eye Reduction Function 32
Setting the Slow Synchro Function 32
Using the Digital Zoom 33
Continuous Shooting 34
Postcard Mode 35
Embedding the Date in the Image Data 35
Setting the Display Overlay 36
Shooting Vertically (Vertical Shutter Release) 37
Movie Shooting 38
Shooting Panoramic Images (Stitch Assist) 42

Downloaded From camera-usermanual.com Canon Manuals

Switching between Focusing Modes 44
Shooting Hard-to-Focus Subjects (Focus Lock, AF Lock) . . 45
Switching between Metering Modes 47
Adjusting the Exposure Compensation 48
Shooting in Long Shutter Mode 49
Adjusting the Tone (White Balance) 51
Shooting in a My Colors Mode 54
Changing Colors 56
Adjusting the ISO Speed 61
Setting the Auto Rotate Function 62
Creating an Image Destination (Folder) 63
Resetting the File Number 65

Playback/Erasing 67

Magnifying Images 67
Viewing Images in Sets of Nine (Index Playback) 68
Organizing Images by Category (My Category) 69
Jumping to Images 70
Viewing Movies 72
Editing Movies 74
Rotating Images in the Display 76
Playback with Transition Effects 77
Adding Effects with the My Colors Function 78
Attaching Sound Memos to Images 80
Automated Playback (Slide Shows) 82
Protecting Images 87
Erasing Images 89

Print Settings/Transfer Settings 91

Setting the DPOF Print Settings 91
Setting the DPOF Transfer Settings 95

Downloaded From camera-usermanual.com Canon Manuals

Viewing Images on a TV set 97
Customizing the Camera (My Camera Settings) 98
Changing My Camera Settings 98
Registering My Camera Settings 99
Troubleshooting 101
Camera 101
When the power is turned on 101
LCD monitor 102
Shooting 103
Shooting Movies 107
Playback 108
Battery 109
TV monitor output 109
Printing on Direct Print Compatible Printers 110
List of Messages 111
Appendix 115
Battery Handling 115
Handling the Memory Card 117
Using the Battery Charger (Sold Separately) 119
Using an Externally Mounted Flash (Sold Separately) 120
Camera Care and Maintenance 122
Specifications 123
INDEX 134
☆ Functions Available in Each Shooting Mode 138

Downloaded From camera-usermanual.com Canon Manuals

Please Read

Test Shots

Before you try to photograph important subjects, we highly recommend that you shoot several trial images to confirm that the camera is operating and being operated correctly.

Please note that Canon Inc., its subsidiaries and affiliates, and its distributors are not liable for any consequential damages arising from any malfunction of a camera or accessory, including memory cards, that results in the failure of an image to be recorded or to be recorded in a way that is machine readable.

Warning Against Copyright Infringement

Please note that Canon digital cameras are intended for personal use and should never be used in a manner that infringes upon or contravenes international or domestic copyright laws and regulations. Please be advised that in certain cases the copying of images from performances, exhibitions, or commercial properties by means of a camera or other device may contravene copyright or other legal rights even if the image was shot for personal use.

Warranty Limitations

For information on your camera's warranty, please refer to the Canon European Warranty System (EWS) Booklet supplied with your camera.

For Canon Customer Support contacts, please see rear of the European Warranty System (EWS) Booklet.

Downloaded From camera-usermanual.com Canon Manuals

Camera Body Temperature
If your camera is used for prolonged periods, the camera body may become warm. Please be aware of this and take care when operating the camera for an extended period.

About the LCD Monitor
The LCD monitor is produced with extremely high-precision manufacturing techniques. More than 99.99% of the pixels operate to specification. Less than 0.01% of the pixels may occasionally misfire or appear as red or black dots. This has no effect on the recorded image and does not constitute a malfunction.

Video Format
Please set the camera's video signal format to the one used in your region before using it with a TV monitor (p. 97).

Language Setting
Please see the *Basic Guide* (p. 11) to change the language setting.

Safety Precautions

- Before using the camera, please ensure that you read the safety precautions described below and in the "Safety Precautions" section of the *Basic Camera User Guide*. Always ensure that the camera is operated correctly.
- The safety precautions noted on the following pages are intended to instruct you in the safe and correct operation of the camera and its accessories to prevent injuries or damage to yourself, other persons and equipment. Be sure you fully understand them before reading the rest of the manual.
- Equipment refers to the camera, camera station, compact power adapter or separately sold battery charger.
- Battery refers to the battery pack.

Downloaded From camera-usermanual.com Canon Manuals

⚠ Warnings

Equipment

- **Do not aim the camera directly into the sun or at other intense light sources that could damage your eyesight.**

- **Store this equipment out of the reach of children and infants.**
  - Wrist strap: Placement of the strap around the child's neck could result in asphyxiation.
  - Memory card: Dangerous if accidentally swallowed. If this occurs, contact a doctor immediately.

- **Do not attempt to disassemble or alter any part of the equipment that is not expressly described in this guide.**
- **To avoid the risk of high-voltage electrical shock, do not touch the flash portion of the camera if it has been damaged.**
- **Stop operating the equipment immediately if it emits smoke or noxious fumes.**
- **Do not allow the equipment to come into contact with, or become immersed in, water or other liquids. If the exterior comes into contact with liquids or salt air, wipe it dry with a soft, absorbent cloth.**

  Continued use of the equipment may result in fire or electrical shock. Immediately turn the camera power off and remove the camera battery or unplug the power cord from the power outlet. Please consult your camera distributor or the closest Canon Customer Support Help Desk.

- **Do not use substances containing alcohol, benzine, thinners or other flammable substances to clean or maintain the equipment.**
- **Do not cut, damage, alter or place heavy items on the power cord.**
- **Use only recommended power accessories.**
- **Remove the power cord on a regular periodic basis and wipe away the dust and dirt that collects on the plug, the exterior of the power outlet and the surrounding area.**
- **Do not handle the power cord if your hands are wet.**

  Continued use of the equipment may result in fire or electrical shock.

Downloaded From camera-usermanual.com Canon Manuals

Battery

- **Do not place the battery near a heat source or expose it to direct flame or heat.**
- **The battery should not be immersed in water or sea water.**
- **Do not attempt to disassemble, alter or apply heat to the battery.**
- **Avoid dropping or subjecting the battery to severe impacts that could damage the casing.**
- **Use only recommended battery and accessories.**

Use of battery not expressly recommended for this equipment may cause explosions or leaks, resulting in fire, injury and damage to the surroundings. In the event that a battery leaks and the eyes, mouth, skin or clothing contact these substances, immediately flush with water and seek medical assistance.

- **Disconnect the compact power adapter from both the camera station and the power outlet, or disconnect the battery charger from the power outlet after recharging or when not in use to avoid fire and other hazards.**
- **Do not place anything, such as tablecloths, carpets, bedding or cushions, on top of the equipment while it is charging.**

Continued use over a long period may cause the units to overheat and distort, resulting in fire.

- **Use only the specified compact power adapter and battery charger to charge the battery.**
- **The compact power adapter and battery charger are designed for exclusive use with your camera. Do not use it with other products or batteries.**

There is a risk of overheating and distortion which could result in fire or electrical shock.

- **Before you discard a battery, cover the terminals with tape or other insulators to prevent direct contact with other objects.**

Contact with the metallic components of other materials in waste containers may lead to fire or explosions.

Downloaded From camera-usermanual.com Canon Manuals

Others

- **Do not trigger the flash in close proximity to human or animal eyes. Exposure to the intense light produced by the flash may damage eyesight.**

In particular, remain at least one meter (39 inches) away from infants when using the flash.

- **Keep objects that are sensitive to magnetic fields (such as credit cards) away from the speaker of the camera.**

Such items may lose data or stop working.

⚠ Cautions

Equipment

- **Be careful not to bang the camera or subject it to strong impacts or shocks that could lead to injury or damage the equipment when wearing or holding it by the strap.**

- **Do not store the equipment in humid or dusty areas.**
- **Do not allow metal objects (such as pins or keys) or dirt to contact the charger terminals or plug.**

Such conditions could lead to fire, electrical shock or other damage.

- **Avoid using, placing or storing the equipment in places subject to strong sunlight or high temperatures, such as the dashboard or trunk (boot) of a car.**
- **Do not use the equipment in a manner that exceeds the rated capacity of the electrical outlet or wiring accessories. Do not use if the power cord or plug are damaged, or if not fully plugged into the outlet.**
- **Do not use in locations with poor ventilation.**

The above-mentioned can cause leakage, overheating or explosion, resulting in fire, burns or other injuries. High temperatures may also cause deformation of the casing.

- **When not using the camera for extended periods of time, remove the battery from the camera or battery charger and store the equipment in a safe place.**

The battery can run down.

Downloaded From camera-usermanual.com Canon Manuals

Equipment

- **Do not connect compact power adapters or battery chargers to devices such as electrical transformers for foreign travel because it may lead to malfunctions, excessive heat generation, fire, electric shock or injury.**

Flash

- **Do not operate the flash with dirt, dust or other items stuck to the surface of the flash.**
- **Be careful not to cover the flash with your fingers or clothing when shooting.**

The flash may be damaged and emit smoke or noise. The resulting heat build-up could damage the flash.

- **Do not touch the surface of the flash after taking several pictures in rapid succession.**

Doing so could result in burns.

Downloaded From camera-usermanual.com Canon Manuals

Preventing Malfunctions

Avoid Strong Magnetic Fields

- **Never place the camera in close proximity to electric motors or other equipment generating strong electromagnetic fields.**

Exposure to strong magnetic fields may cause malfunctions or corrupt image data.

Avoid Condensation Related Problems

- **When moving the equipment rapidly from a cold place to a hot place, you can avoid condensation by placing the equipment in an airtight, resealable plastic bag and letting it adjust to temperature changes slowly before removing it from the bag.**

Moving the equipment rapidly from a cold place to a hot place may cause condensation (water droplets) to form on its external and internal surfaces.

If Condensation Forms Inside the Camera

- **Stop using the camera immediately.**

Continued use may damage the equipment. Remove the memory card and battery or compact power adapter from the camera and wait until the moisture evaporates completely before resuming use.

Downloaded From camera-usermanual.com Canon Manuals

Using the LCD Monitor

You can switch between display styles for information shown on the LCD monitor as follows.

1 **(Set up) Menu ▶ [Info Display].**

See *Menus and Settings* (p. 23).

2 **[Shooting Info]/[Review Info]/[Replay Info] ▶ Select a display mode.**

See *Menus and Settings* (p. 23).

- In a shooting mode, the shooting information will display for approximately 6 seconds when you change a setting, regardless of the selected info display mode setting.



The LCD monitor will not switch to detailed display in magnified display (p. 67), or index playback mode (p. 68).

Downloaded From camera-usermanual.com Canon Manuals

Using the Clock

You can display the current date and time for a 5-second* interval using the following two methods.

* Default setting



Method 1

Hold the **FUNC./SET** button down while turning on the power.

Method 2

In a shooting mode, hold the **FUNC./SET** button down.

If you hold the camera horizontally, it displays the time. If you hold it vertically, the time and date display.

However, if you hold the camera vertically and use method 1 to display the date and time, the time will be initially displayed in the same way as when the camera is held horizontally.

- You can change the display color by pressing the ◆ or ◆ button.
- The clock display will cease when the display interval is over or when you operate the **FUNC./SET**, **MENU** or shutter button or the mode switch.
- The clock's display interval can be changed in the (Set up) menu (p. 27).

LCD Monitor Brightness (Night Display Function)

When shooting in dark conditions, the camera automatically brightens the LCD monitor to suit the brightness of the subject*, making it easier to frame the subject.

* The movement of the subject shown on the LCD monitor will be jerky, but it will not affect the recorded images. The brightness of the image displayed in the monitor, and the brightness of the actual image recorded will be different.

Downloaded From camera-usermanual.com Canon Manuals

Information Displayed on the LCD Monitor

Shooting Information (Shooting mode)



[ ] * Spot Frame

[ ]* AF Frame (p. 44)

Zoom Magnification* (p. 33)

Macro (*Basic Guide* p. 17)

Metering Mode (p. 47)

Flash (*Basic Guide* p. 16)

Auto Rotate (p. 62)

● Rec.* Movie Recording (p. 38)

* Low Battery (p. 115)

* AF Lock (p. 45)

Time Zone (p. 20)

* Create Folder (p. 63)

3:2 Guide* (p. 36)

Grid Lines* (p. 36)

- Stills: Recordable Shots
- Movies: Remaining Time/ Elapsed Time

Shooting Mode (p. 38, 42, 56, 58, *Basic Guide* pp. 13 – 15)

-2 ··· +2 Exposure Compensation (p. 48)

1" ··· 15" Long Shutter Mode (p. 49)

ISO HI / ISO 80 / ISO 100 / ISO 200 / ISO 400 / ISO 800 / ISO 1600
ISO Speed (p. 61)

White Balance (p. 51)

Shooting Method (p. 34, *Basic* p. 18)

My Colors (p. 54)

Compression (Still Images) (p. 30)

L / M1 / M2 / M3 / S / W
Recording Pixels (Still Images) (p. 30)

640 30 / 640 15 / 320 60 / 320 30 / 320 15 / 160 15
Recording Pixels/Frame Rate (Movie) (p. 41)

(Red)* Camera Shake Warning (p. 102)
(The shutter speed will also display when the displays.)

* Appears even if the LCD monitor is set to Standard display.

Downloaded From camera-usermanual.com Canon Manuals

- If the indicator blinks orange and the camera shake icon displays, it indicates there is insufficient illumination and a slow shutter speed will be selected. Shoot using the following methods.
  - Raise the ISO speed (p. 61).
  - Select a flash setting other than (flash off) (*Basic Guide* p. 16).
  - Attach the camera to a tripod or other device.

Review Info

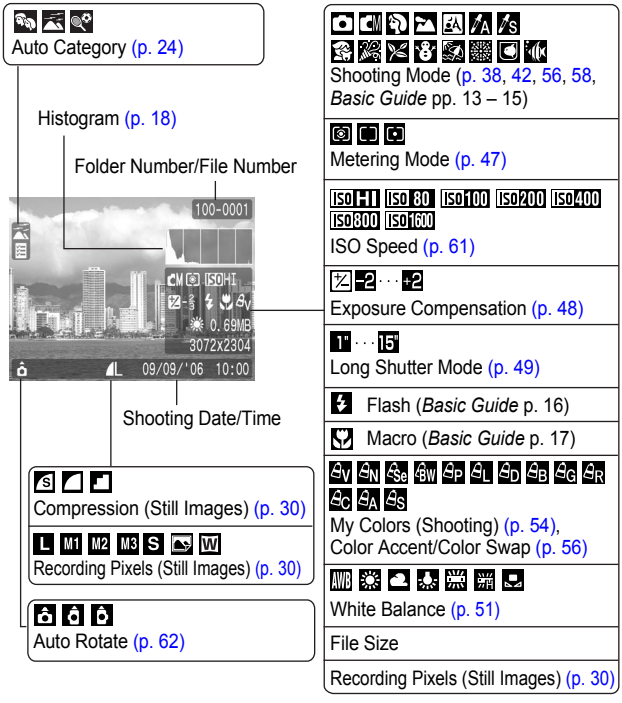
Auto Category (p. 24)
Histogram (p. 18)
Folder Number/File Number
100-0001
0.69MB
3072x2304
09/09/'06 10:00
Shooting Date/Time
Compression (Still Images) (p. 30)
Recording Pixels (Still Images) (p. 30)
Auto Rotate (p. 62)
Shooting Mode (p. 38, 42, 56, 58, *Basic Guide* pp. 13 – 15)
Metering Mode (p. 47)
ISO Speed (p. 61)
Exposure Compensation (p. 48)
Long Shutter Mode (p. 49)
Flash (*Basic Guide* p. 16)
Macro (*Basic Guide* p. 17)
My Colors (Shooting) (p. 54), Color Accent/Color Swap (p. 56)
White Balance (p. 51)
File Size
Recording Pixels (Still Images) (p. 30)

Downloaded From camera-usermanual.com Canon Manuals

Playback Information (Playback Mode)

Standard

WAVE Format Sound (p. 80)

Folder Number-File Number

Shooting Date/Time

Protection Status (p. 87)

Total number of images

Displayed image number

Compression (Still Images) (p. 30)

L M1 M2 M3 S W

Recording Pixels (Still Images) (p. 30)

AVI

Movie (p. 72)

Downloaded From camera-usermanual.com Canon Manuals

Detailed

My Category (p. 69)

Defined Playback (p. 70)

Histogram

1" · · · 15"
Long Shutter Mode (p. 49)

Flash (*Basic Guide* p. 16)

Macro (*Basic Guide* p. 17)

My Colors (Playback) (p. 78)

My Colors (Shooting) (p. 54), Color Accent/Color Swap (p. 56)

Shooting Mode (p. 38, 42, 56, 58, *Basic Guide* pp. 13 – 15)

Metering Mode (p. 47)

ISO HI ISO 80 ISO 100 ISO 200 ISO 400 ISO 800 ISO 1600
ISO Speed (p. 61)

640 320 160 60 30 15
Recording Pixels/Frame Rate (Movies) (p. 41)

Image with the My Colors effect (p. 78)

AWB
White Balance (p. 51)

File Size

-2 · · · +2
Exposure Compensation (p. 48)

Recording Pixels (Still Images) (p. 30)
Movie Length (Movies) (p. 38)

The following information may also be displayed with some images.

	A sound file in a format other than the WAVE format is attached or the file format is not recognized.
	JPEG image not conforming to Design rule for Camera File System Standards
RAW	RAW image
	Unrecognized data type

Information for images shot on other cameras may not display correctly.

Downloaded From camera-usermanual.com Canon Manuals

Histogram Function

The histogram is a graph that allows you to check the brightness of the image. The greater the bias toward the left in the graph, the darker the image. The greater the bias toward the right, the brighter the image.

If the image is too dark, adjust the exposure compensation to a positive value. Similarly, adjust the exposure compensation to a negative value if the image is too bright (p. 48).

Sample Histograms

Dark Image

Balanced Image



Bright Image

Downloaded From camera-usermanual.com Canon Manuals

Power Saving Function

This camera is equipped with a power saving function. The power will shut off in the following circumstances. Press the power button again to restore power.

Shooting Mode	Powers down approximately 3 minutes after the last control is accessed on the camera. The LCD monitor automatically turns off 1 minute* after the last control is accessed even if [Auto Power Down] is set to [Off]. Press any button other than the power button or change the camera orientation to turn the LCD monitor back on.
Playback Mode **Connected to a Printer**	Powers down approximately 5 minutes after the last control is accessed on the camera.

* This time can be changed.

- The power saving function will not activate during a slide show or while the camera is connected to a computer.
- The power saving function settings can be changed (p. 26).

Downloaded From camera-usermanual.com Canon Manuals

Setting the World Clock

When traveling abroad, you can record images with local dates and times simply by switching the time zone setting if you pre-register the destination time zones. You can enjoy the convenience of not having to switch the Date/Time settings.

Setting the Home/World Time Zones

1 **(Set up) Menu ▶ [Time Zone] ▶ (FUNC. SET).**

See *Menus and Settings* (p. 23).



2 **▶ (FUNC. SET).**



3 **Use the ◀ or ▶ button to select a home time zone ▶ (FUNC. SET).**

- To set the daylight saving option, use the ▲ or ▼ button to display ☀. The time will advance by 1 hour.

4 **✈ ▶ (FUNC. SET).**

Downloaded From camera-usermanual.com Canon Manuals

5 **Use the ◀ or ▶ button to select a destination time zone ▶ (FUNC./SET).**

- As in Step 3, you can set daylight saving time.

6 **Use the ▲ or ▼ button to select [Home/World], and the ◀ or ▶ button to select 🏠 ▶ (MENU).**

Switching to the Destination Time Zone

1 **(Set up) Menu ▶ [Time Zone] ▶ (FUNC./SET).**

See *Menus and Settings* (p. 23).



2 **Use the ◀ or ▶ button to select ✈ ▶ (MENU).**

- To change the destination time zone, use the **FUNC./SET** button.
- When you switch to the destination time zone, ✈ will display on the monitor.



If you change the date and time when the World option is selected, the Home date and time will also change automatically.

Downloaded From camera-usermanual.com Canon Manuals

Menus and Settings

Menus are used to set the shooting, playback and print settings as well as such camera settings as the date/time and electronic beep. The following menus are available.

- **FUNC. Menu**
- **Rec., Play, Print, Set up and My Camera Menus**

FUNC. Menu

This menu sets many of the common shooting functions.

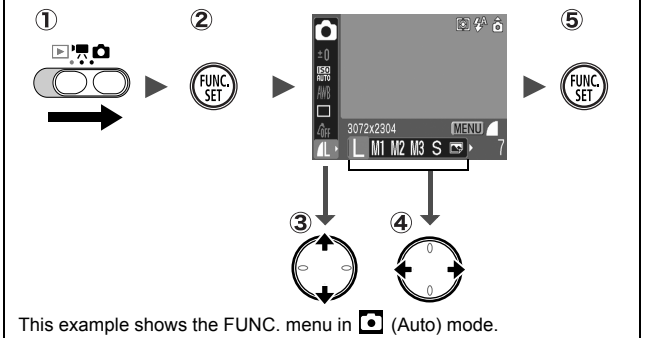

This example shows the FUNC. menu in (Auto) mode.

① **Slide the mode switch to or .**

② **Press the FUNC./SET button.**

③ **Use the or button to select a menu item.**

- Some items may not be selectable in some shooting modes.

④ **Use the or button to select an option for the menu item.**

- You can select further options with the **MENU** button for some options.
- After selecting an option, you can press the shutter button to shoot immediately. After shooting, this menu will appear again, allowing you to adjust the settings easily.

⑤ **Press the FUNC./SET button.**

Downloaded From camera-usermanual.com Canon Manuals

Rec., Play, Print, Set up and My Camera Menus

Convenient settings for shooting, playback or printing can be set with these menus.

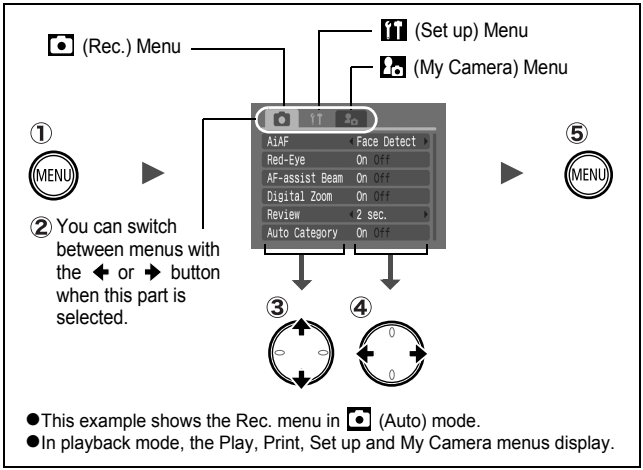

- This example shows the Rec. menu in (Auto) mode.
- In playback mode, the Play, Print, Set up and My Camera menus display.

① **Press the MENU button.**

② **Use the ◆ or ◆ button to switch between menus.**

③ **Use the ▲ or ▼ button to select menu items.**

- Some items may not be selectable in some shooting modes.

④ **Use the ◆ or ◆ button to select an option.**

- Menu items followed by an ellipsis (...) can only be set after pressing the **FUNC./SET** button to display the next menu. Press the **FUNC./SET** button again to confirm the setting.

⑤ **Press the MENU button.**

Downloaded From camera-usermanual.com Canon Manuals

Menu List

FUNC. Menu

The icons shown below are the default settings.

Menu Item		Page
	Shooting Mode	*Basic* p. 12
	Movie Mode	p. 38
±0	Exposure Compensation	p. 48
1"	Long Shutter Mode	p. 49
ISO AUTO	ISO Speed	p. 61
AWB	White Balance	p. 51

Menu Item		Page
	Drive Mode	p. 34, *Basic* p. 18
MY OFF	My Colors	p. 54
	Compression (Still Image)	p. 30
L	Recording Pixels (Still Image)	p. 30
640 30	Recording Pixels/ Frame Rate (Movie)	p. 41

Rec. Menu

* Default setting

Menu Item	Options	Page/Topic
AiAF	Face Detect*/On/Off	p. 44
Slow Synchro	On/Off*	p. 32
Red-Eye	On*/Off	p. 32
Light Metering	*/ /	p. 47
AF-assist Beam	On*/Off	p. 104
Digital Zoom	On*/Off	p. 33
Review	Off/2*–10 seconds/Hold	*Basic Guide* p. 13
Save Original	On/Off*	p. 60
Auto Category	On*/Off	Sets whether or not images are automatically classified into categories during shooting.*1
Disp. Overlay	Off*/Grid Lines/3:2 Guide/ Both (movie mode: Off*/Grid Lines)	p. 36
Date Stamp	Off*/Date/Date & Time	p. 35
Vert. Shutter	On*/Off	Allows the button to release the shutter when the camera is held vertically (p. 37).

Downloaded From camera-usermanual.com Canon Manuals

Long Shutter	On/Off*	p. 49
Stitch Assist	left to right*/ right to left	p. 42

*1 They are classified according to the following categories.

People: , , , or images with faces detected if [Face Detect] has been selected in [AiAF] mode.

Scenery: ,

Events: , , , , , ,

Play Menu

Menu Item	Page	Menu Item	Page
Slide Show	p. 82	Sound Memo	p. 80
My Category	p. 69	Rotate	p. 76
Erase	p. 89	Transfer Order	p. 95
Protect	p. 87	Transition	p. 77
My Colors	p. 78		

Print Menu

Menu Item	Page	Menu Item	Page
Print	p. 91	Select by Folder	p. 91
Select Images & Qty.		Select All Images	
Select by Date		Clear All Selections	
Select by Category		Print Settings	

Downloaded From camera-usermanual.com Canon Manuals

Set up Menu

* Default setting

Menu Item	Options	Page/Topic
Mute	On/Off*	Set to [On] to silence all sounds except warning sounds. (*Basic* p. 12)
Volume	Off/1/2*/3/4/5	Adjusts the volume of the start-up sound, operation sound, self-timer sound, shutter sound and playback sound. The volume cannot be adjusted if [Mute] is set to [On].
Start-up Vol.		Adjusts the volume of the start-up sound when the camera is turned on.
Operation Vol.		Adjusts the volume of the operation sound that plays when any button other than the shutter button is pressed.
Selftimer Vol.		Adjusts the volume of the self-timer sound played 2 sec. before the shutter is released.
Shutter Volume		Adjusts the volume of the sound played when the shutter releases. The shutter sound does not play when a movie is recording.
Playback Vol.		Adjusts the volume of movie sounds and sound memos.
Info Display		Switches between info display modes (p. 12).
Shooting Info	Off*/On	Display mode for the shooting modes
Review Info	Off*/On	Display mode for the review period immediately after an image is recorded
Replay Info	Off*/Standard/ Detailed	Display mode in the playback mode
LCD Brightness	-7 to 0* to +7	Use the ◀ or ▶ button to adjust the brightness. You can check the brightness in the LCD monitor while you are adjusting the setting.
Power Saving		p. 19
Auto Power Down	On*/Off	Sets whether or not the camera automatically powers down after a set period of time elapses without the camera being operated.
Display Off	10 sec./20 sec./ 30 sec./1 min.*/2 min./3min.	Sets the length of time before the LCD monitor turns off when no camera operation is performed.

Downloaded From camera-usermanual.com Canon Manuals

Time Zone	Home*/World	p. 20
Date/Time		*Basic Guide* p. 11
Clock Display	0–10*[1] sec./20 sec./30 sec./1 min./2 min./3 min.	p. 13
Format		You can also set it to perform a low level format (p. 29).
File Numbering	Continuous*/ Auto Reset	p. 65
Create Folder		p. 63
Create New Folder	Check mark (On)/ No check mark (Off)	Creates a folder for the next shooting session.
Auto Create	Off*/Daily/ Monday–Sunday/ Monthly	You can also set the Auto Create time.
Auto Rotate	On*/Off	p. 62
Distance Units	m/cm* / ft/in	Sets the units used to display distances in the macro mode. (*Basic* p. 17)
Lens Retract	1 min.*/0 sec.	Sets the timing of the lens retraction when you switch from the shooting to the playback mode.
Language		*Basic Guide* p. 11
Video System	NTSC/PAL	p. 97
Print Method	Auto*/	See below. *2
Reset All		p. 28

*1 Default setting is 5 seconds.

*2 You can change the printer connection method. There is usually no need to change the settings, but select when you print an image recorded in the (Widescreen) mode at the full page setting for wide paper using a Canon SELPHY CP730/CP720/CP710/CP510 Compact Photo Printer. Since this setting is saved even when the power is turned off, ensure that you return the setting to [Auto] to print other image sizes. (However, it cannot be changed while the printer is connected.)

Downloaded From camera-usermanual.com Canon Manuals

My Camera Menu

* Default setting

Menu Item	Available Settings	Page
Theme	Selects a common theme for each My Camera settings item.	p. 98
Start-up Image	Sets the image displayed when the camera power is turned on.	
Start-up Sound	Sets the sound played when the camera power is turned on.	
Operation Sound	Sets the sound played when any button other than the shutter button is pressed.	
Selftimer Sound	Sets the sound played 2 seconds before the shutter releases in self-timer mode.	
Shutter Sound	Sets the sound played when the shutter button is pressed. There is no shutter sound for movies.	
My Camera Menu Contents	(Off)/ 1*/ 2 / 3	

Resetting Settings to Their Default Values

1 **(Set up) Menu ▶ [Reset All].**

See *Menus and Settings* (p. 23).



2 **Select [OK] and press (FUNC SET).**

- Settings cannot be reset when the camera is connected to a computer or to a printer.
- The following cannot be reset.
  - Shooting mode
  - The [Time Zone], [Date/Time], [Language] and [Video System] options in the (Set up) menu (p. 27)
  - White balance data recorded with the custom white balance function (p. 52)
  - Colors specified in the [Color Accent] (p. 56) or [Color Swap] (p. 58) modes.
  - Newly added My Camera settings (p. 99)

Downloaded From camera-usermanual.com Canon Manuals

Formatting Memory Cards

You should always format a new memory card or one from which you wish to erase all images and other data.

Please note that formatting (initializing) a memory card erases all data, including protected images and other file types.

1 (Set up) Menu ▶ [Format].

See *Menus and Settings* (p. 23).



2 Select [OK] and press (FUNC. SET).

- To perform a low level format, use the ▲ button to select [Low Level Format] and the ◀ or ▶ button to add a check mark.
- You can stop formatting a card when [Low Level Format] is selected by pressing the **FUNC./SET** button. You can still use a card without problem when formatting is halted, but its data will be erased.



Low Level Format

We recommend you select [Low Level Format] when you think that the recording/reading speed of a memory card has dropped. A low level format may require 2 to 3 minutes with some memory cards.

Downloaded From camera-usermanual.com Canon Manuals

Changing the Recording Pixels and Compression (Still Images)

Shooting Mode

1 FUNC. Menu ▶ ▶ L* (Recording Pixels) ▶ (MENU) ▶ * (Compression).

See *Menus and Settings* (p. 22).

* Default setting.

- Use the ◀ or ▶ button to select recording pixels/compression settings and press the **FUNC./SET** button.

Approximate Values for Recording Pixels

Recording Pixels			Purpose*
L (Large)	3072 x 2304 pixels	High	Printing to about A3-size 297 x 420 mm (11.7 x 16.5 in.)
M1 (Medium 1)	2592 x 1944 pixels		Printing to about A4-size 210 x 297 mm (8.3 x 11.7 in.) Printing to about Letter-size 216 x 279 mm (8.5 x 11 in.)
M2 (Medium 2)	2048 x 1536 pixels		Printing to about A5-size 148 x 210 mm (5.8 x 8.3 in.)
M3 (Medium 3)	1600 x 1200 pixels		Print postcard-size prints 148 x 100 mm (6 x 4 in.) Print L-size prints 119 x 89 mm (4.7 x 3.5 in.)
S (Small)	640 x 480 pixels	Low	Send images as e-mail attachments or shoot more images
or (Postcard)	1600 x 1200 pixels	When printing to postcards (p. 35).	
W (Widescreen)	3072 x 1728 pixels	Printing on wide size paper (you can check the composition at a 16:9 aspect ratio. Areas that will not be recorded appear on the LCD monitor as a black border.)	

* Paper sizes vary according to region.

Downloaded From camera-usermanual.com Canon Manuals

Approximate Values for Compression Settings

Compression		Purpose
Superfine	High Quality	Shoot higher quality images
Fine	↕	Shoot normal quality images
Normal	Normal	Shoot more images

- See *Image Data Sizes (Estimated)* (p. 130).
- See *Memory Cards and Estimated Capacities* (p. 128).

Downloaded From camera-usermanual.com Canon Manuals

Red-Eye Reduction Function

Shooting Mode

Setting the red-eye reduction function* to [On] causes the red-eye reduction lamp to fire with the flash.

*This function reduces the effect of light reflecting back from the eyes and making them appear red.

1 **(Rec.) Menu ▶ [Red-Eye] ▶ [On]*/[Off].**

See *Menus and Settings* (p. 23).

*Default setting.



Setting the Slow Synchro Function

Shooting Mode

You can shoot with the flash at slow shutter speeds. This is handy for shooting at night or under artificial lighting indoors.

1 **(Rec.) Menu ▶ [Slow Synchro] ▶ [On]/[Off]*.**

See *Menus and Settings* (p. 23).

*Default setting.



You are recommended to fix the camera to a tripod to shoot in this mode.

Downloaded From camera-usermanual.com Canon Manuals

Using the Digital Zoom

Shooting Mode

You can shoot zoomed images using the combined digital and optical zooms. The focal lengths (35 mm film equivalent) and characteristics are as follows.

Option	Focal Length	Characteristics
On	38 – 360 mm	You can shoot at a maximum zoom factor of approximately 10x using a combination of the optical and digital zoom features.
Off	38 – 90 mm	Shoots without using the digital zoom.

The digital zoom cannot be used in the or (Postcard mode) or the W (Widescreen) mode.

1 (Rec.) Menu ▶ [Digital Zoom] ▶ [On]*/[Off].

See *Menus and Settings* (p. 23).

*Default setting.



2 Press the button and shoot.

- The combined optical and digital zoom factor will appear on the LCD monitor.
- Based on the number of recording pixels set, the Safety Zoom feature calculates the maximum zoom factor beyond which image quality will begin to deteriorate. The digital zoom pauses at this zoom factor for a moment, and appears on the LCD monitor. If you press the button again, you can zoom in even closer. In this case, the displayed zoom factor changes from white to blue.
- Pressing the button zooms out.

Downloaded From camera-usermanual.com Canon Manuals

Continuous Shooting

Shooting Mode

In this mode, the camera shoots continuously while the shutter button is held down.

If you use the recommended memory card*, you can shoot continuously at a set shooting interval until the memory card is full (smooth continuous shooting) (p. 128).

***Recommended Memory Card**

Super high speed SDC-512 MSH memory card (sold separately) newly formatted with low level formatting (p. 29).

- This reflects standard shooting criteria established by Canon. Actual results may vary according to the subject and shooting conditions.
- Even if continuous shooting suddenly stops, the memory card may not be full.

1 FUNC. Menu ▶ ■* (Drive Mode) ▶ ■.

See *Menus and Settings* (p. 22).

*Default setting.

2 Shoot.

- The camera will continue to record successive images while the shutter button is fully pressed. Recording will cease when the shutter button is released.

To Cancel Continuous Shooting

Select ■ in Step 1.

- The interval between shots lengthens when the built-in memory of the camera fills.
- If the flash is used, the interval between shots lengthens because the flash must charge.

Downloaded From camera-usermanual.com Canon Manuals

Postcard Mode

Shooting Mode

You can shoot images with the optimal settings for postcards by composing them inside the print area (width-to-height ratio of approximately 3:2) shown in the LCD monitor.

1 FUNC. Menu ▶ [L]* ▶ (Postcard).

See *Menus and Settings* (p. 22).

*Default setting.

- The recording pixels are set to M3 (1600 x 1200) and the compression to (Fine).
- The area that will not print displays in gray.



The digital zoom cannot be used in this mode.

For printing instructions, refer to the *Direct Print User Guide*.

Embedding the Date in the Image Data

You can embed the date in image data when (Postcard) is selected.

1 (Rec.) Menu ▶ [Date Stamp] ▶ [Off]*/ [Date]/[Date & Time].

See *Menus and Settings* (p. 23).

*Default setting.

- **LCD Monitor Display**

: [Off]

: [Date]/[Date & Time]



- Ensure that the camera's date/time is set beforehand (p. 27).
- The date stamp cannot be deleted from the image data once it has been embedded.

Downloaded From camera-usermanual.com Canon Manuals

Setting the Display Overlay

Shooting Mode

You can check a composition's horizontal and vertical alignment as well as a 3:2 aspect ratio print range on the LCD monitor by using a shooting guide while shooting.

Grid Lines	Displays grid lines dividing the monitor into 9 areas, allowing you to check the subject's horizontal and vertical alignment.
3:2 Guide	You can check what can be printed in a composition using a 3:2 aspect ratio. The portion that will not print displays in gray. *Images are recorded at the same aspect ratio of 4:3 as shown in the normal viewing mode.
Both	You can display both the grid lines and 3:2 guide at the same time.

1 (Rec.) Menu ▶ [Disp. Overlay] ▶ [Off]*/ [Grid Lines]/[3:2 Guide]/[Both].

See *Menus and Settings* (p. 23).

*Default setting.

- The grid lines and 3:2 guide do not appear on recorded images.
- In mode, only [Grid Lines] can be used.

Downloaded From camera-usermanual.com Canon Manuals

Shooting Vertically (Vertical Shutter Release)

Shooting Mode

With the camera held vertically, you can release the shutter by pressing the button in place of the shutter button. You can also shoot with the shutter button.

1 **(Rec.) Menu ▶ [Vert. Shutter] ▶ [On]*/ [Off].**

See *Menus and Settings* (p. 23).

*Default setting.

2 **Select a shooting mode.**

3 **Hold the camera vertically, aim at the subject and press the button.**

- The button will behave as follows.
  - **Lit Up:** ready to shoot
  - **Off:** shooting a still image
  - **Blinking:** shooting a movie
- Unlike the shutter button, this button does not have a halfway stage. When the camera focuses, it will beep twice and record the image immediately.
- To review the image immediately after taking the shot, continue to hold the button.

Displays when using Vertical Shutter Release

Downloaded From camera-usermanual.com Canon Manuals

Movie Shooting

Shooting Mode

The following movie modes are available.
For information on the recording pixels and frame rate in each mode, refer to *Changing Recording Pixels and Frame Rates* (p. 41).

Standard	
	You can select the recording pixels and frame rate and record until the memory card is full (when a super high-speed memory card is used, such as the recommended SDC-512MSH). The digital zoom can be used while shooting in this mode. (p. 33)
	• Maximum Size: 4 GB*/movie
Fast Frame Rate	
	Use this mode to record fast moving subjects, such as in sports photography.
	• Maximum Clip Length: 1 minute
Compact	
	Since there are few recording pixels and also the data size is small, this mode is convenient for sending movies as e-mail attachments or when the memory card capacity is low.
	• Maximum Clip Length: 3 minutes
Color Accent **Color Swap**	
	You can have only the specified color remain and change all others into black and white, or change a specified color into a different color (p. 56, 58). As with the Standard mode, you can also select the recording pixels and frame rate and record until the memory card is full (when a super high-speed memory card is used, such as the recommended SDC-512MSH).
	• Maximum Size: 4 GB*/movie

- The recording time will vary according to the capacity of the memory card you use (p. 129).

* Recording will stop after one hour of continuous recording even if the recorded data volume has not reached 4 GB.

Downloaded From camera-usermanual.com Canon Manuals

1 FUNC. Menu ▶ * (Standard).

See *Menus and Settings* (p. 22).

*Default setting.



- Use the ◀ or ▶ button to select a movie mode and press the **FUNC./SET** button.
- In , , or mode, you can change the recording pixels and frame rate (p. 41).
- See *Changing Colors* (p. 56) for the procedures for using and .

2 Shoot.

- Pressing the shutter button halfway automatically sets the exposure, focus and white balance settings.
- Pressing the shutter button fully starts recording video and sound simultaneously.
- During shooting the recording time and [●Rec] appear on the LCD monitor.
- Pressing the shutter button fully again stops recording. Recording will stop automatically under the following circumstances.
  - When the maximum recording time elapses
  - When the built-in memory or memory card become full

Downloaded From camera-usermanual.com Canon Manuals

- You are recommended to use a memory card that has been formatted in your camera to shoot movies (p. 29). The card supplied with the camera may be used without further formatting.
- Be careful of the following while recording.
  - Try not to touch the microphone.
  - Do not press any buttons other than the shutter button. The sound that buttons make will be recorded in the movie.
  - The camera will automatically adjust the exposure and white balance to suit the shooting conditions during recording. Please note, however, that the sounds made by the camera automatically adjusting the exposure may also be recorded.
- The focus and optical zoom settings remain fixed for subsequent frames at the values selected for the first frame.
- Do not aim the camera toward the sun to shoot.

QuickTime 3.0 or later is required to play back movies (Data type: AVI/Compression method: Motion JPEG) on a computer. QuickTime (for Windows) is included on the Canon Digital Camera Solution Disk. On the Macintosh platform, this program is standard with Mac OS X or later.

Downloaded From camera-usermanual.com Canon Manuals

Changing Recording Pixels and Frame Rates

You can change the recording pixels and frame rate when the movie mode is set to (Standard), (Color Accent) or (Color Swap).

1 **FUNC. Menu ▶ * (Recording Pixels/ Frame Rate).**

See *Menus and Settings* (p. 22).

*Default setting.

- Use the ◀ or ▶ button to select recording pixels/frame rate settings and press the **FUNC./SET** button.

Recording Pixels and Frame Rates

Frame rates indicate the number of frames recorded or played back each second. The higher the frame rate, the smoother the appearance of motion.

		Recording Pixels	Frame Rate (frames/sec.)
Standard Color Accent Color Swap	640 30 *1	640 x 480 pixels	30
	640 15		15
	320 30	320 x 240 pixels	30
	320 15		15
Fast Frame Rate*2	320 60	320 x 240 pixels	60
Compact*2	160 15	160 x 120 pixels	15

*1 Default setting

*2 The recording pixels and frame rate are fixed.

- See *Image Data Sizes (Estimated)* (p. 130).
- See *Memory Cards and Estimated Capacities* (p. 129).

Downloaded From camera-usermanual.com Canon Manuals

Shooting Panoramic Images (Stitch Assist)

Shooting Mode

Stitch Assist can be used to shoot overlapping images that can later be merged (stitched) to create one panoramic image on a computer.

The overlapping seams of several adjacent images can be joined into a single panoramic image.

1 (Rec.) Menu ▶ [Stitch Assist].

See *Menus and Settings* (p. 23).

2 Select a shooting direction ▶ (FUNC. SET).

- You can select from the following two shooting directions.
  - Left to right horizontally
  - Right to left horizontally



Downloaded From camera-usermanual.com Canon Manuals

3 Shoot the first image in the sequence.

- The exposure and white balance are set and locked with the first image.

4 Compose the second image so that it overlaps a portion of the first and shoot.

- You can retake a shot by pressing the ◀ or ▶ button and returning to the previously recorded image screen.
- Minor discrepancies in the overlapping portions can be corrected when the images are stitched together.

5 Repeat the procedure for additional images.

- A sequence may contain up to 26 images.
- Press the **MENU** button after the last shot.

The settings for the first image are applied to the second image onward.

Use PhotoStitch, a supplied software program, to merge the images on a computer.

Downloaded From camera-usermanual.com Canon Manuals

Switching between Focusing Modes

Shooting Mode

Select from among the following three focusing methods.

[ ]	**Face Detect**	You can have the camera automatically detect the position of a face and use this data to set the focus and exposure* while shooting. *Only in evaluative metering mode (p. 47).
(No frame)	**On**	The camera detects the subject and highlights the AF frames, from 9 available points, that it will use to determine the focus.
□	**Off**	The camera focuses using the center AF frame. This is convenient for focusing on a specific part of a subject with greater certainty.

1 **(Rec.) Menu ▶ [AiAF] ▶ [Face Detect]*/[On]/[Off].**

See *Menus and Settings* (p. 23).

*Default setting.

- The AF frame appears as follows when the shutter button is pressed halfway.
  - Green: Shooting preparations complete
  - Yellow: Focusing difficulty (AiAF set to [Off])
- The following occurs when [Face Detect] is selected.
  - Up to three AF frames display. At this point, the frame the camera judges to be the main subject appears in white while the others appear in gray. Pressing the shutter button halfway displays up to 9 green AF frames.
  - If no white frame displays and all the frames appear in gray, images will be shot using the [On] option rather than [Face Detect].
  - The camera may mistakenly identify non-human subjects as a face. If this occurs, switch to the [On] or [Off] option.
  - When a face is not detected, images will be shot using the [On] option.

Downloaded From camera-usermanual.com Canon Manuals

- In [Face Detect] mode, faces may not be detected under the following circumstances.
  - If the faces appear small, large, dark or bright relative to the overall composition.
  - If the subjects are looking sideways or lying down, or their faces are partially obscured.

Shooting Hard-to-Focus Subjects (Focus Lock, AF Lock)

Shooting Mode

It may be difficult to focus on the following types of subjects.

- Subjects with extremely low contrast to the surroundings
- Scenes with a mixture of near and far subjects.
- Subjects with extremely bright objects at the center of the composition
- Subjects that are moving quickly
- Subjects through glass: Try to shoot as close to the glass as possible to reduce the chances of light reflecting back off the glass.

Shooting with the Focus Lock

The focus lock can be used in any shooting mode. Set the [AiAF] function to [Off] beforehand (p. 44).

1 **Aim the camera so that an object at the same focal distance as the main subject is centered in the AF frame.**

2 **Press the shutter button halfway to set the focus.**

3 **Keep the button pressed, re-aim the camera to compose the shot as desired and press the shutter button fully.**

Downloaded From camera-usermanual.com Canon Manuals

Shooting with the AF Lock

The AF lock can be used in the , , , or mode.

1 Aim the camera so that an object at the same focal distance as the main subject is centered in the AF frame.

2 Press the shutter button halfway and press the button.

- The AFL icon will display.

3 Re-aim the camera to compose the shot as desired and shoot.

To Release the AF Lock

Press the button.

- The AF lock is convenient because you can let go of the shutter button to compose the image. Moreover, the AF lock is still effective after the picture is taken, allowing you to capture a second image with the same focus.
- In mode the AF frame does not display.

Downloaded From camera-usermanual.com Canon Manuals

Switching between Metering Modes

Shooting Mode

1 **(Rec.) Menu ▶ [Light Metering] ▶ */ / .**

See *Menus and Settings* (p. 23).

*Default setting.



Metering Methods

	Evaluative	Appropriate for standard shooting conditions, including backlit scenes. The camera divides images into several zones for metering. It evaluates complex lighting conditions, such as the position of the subject, the brightness, the direct light, and the backlighting, and adjusts the settings to the correct exposure for the main subject.
	Center Weighted Average	Averages the light metered from the entire frame, but gives greater weight to the subject matter at the center.
	Spot	Meters the area within the spot AE point at the center of the LCD monitor. Use this setting when you want to set the exposure on the subject in the center of the monitor.

Downloaded From camera-usermanual.com Canon Manuals

Adjusting the Exposure Compensation

Shooting Mode

Adjust the exposure compensation to a positive value to avoid making the subject too dark when it is backlit or shot against a bright background. Adjust the exposure compensation to a negative value to avoid making the subject too bright in night shots or when shot against a dark background.

1 FUNC. Menu ▶ ±0* (Exposure Compensation).

See *Menus and Settings* (p. 22).

*Default setting.

- Use the ◀ or ▶ button to adjust the exposure compensation and press the **FUNC./SET** button.

To Cancel the Exposure Compensation

Restore the compensation value to [0].

Downloaded From camera-usermanual.com Canon Manuals

Shooting in Long Shutter Mode

Shooting Mode

You can set the shutter speed to a slow setting to make dark subjects appear brighter.

1 **(Rec.) Menu ▶ [Long Shutter] ▶ [On].**

See *Menus and Settings* (p. 23).

2 **FUNC. Menu ▶ ±0* (Exposure Compensation) ▶ (MENU).**

See *Menus and Settings* (p. 22).

*Default setting.



3 **Use the ← or → button to select the shutter speed ▶ (FUNC. SET).**

- The higher the value, the brighter the image and the lower the value, the darker the image.
- If you press the **MENU** button at this point, you will return to the Exposure Compensation setting screen.

Downloaded From camera-usermanual.com Canon Manuals

The nature of CCD image sensors is such that noise in the recorded image increases at long shutter speeds. This camera, however, applies special processing to images shot at shutter speeds slower than 1.3 seconds to eliminate the noise, thereby producing high-quality images. A certain amount of processing time, however, may be required before the next image can be shot.

- Use the LCD monitor to confirm that the image was recorded at the desired brightness.
- Please note that camera shake becomes a factor at low shutter speeds. Shoot with the camera attached to a tripod.
- Use of the flash may result in an over-exposed image. If this occurs, shoot with the flash set to .
- The following are unavailable:
  - Exposure Compensation
  - Metering
  - ISO speed: Auto, High ISO Auto
  - Flash: Auto
  - Slow Synchro

Downloaded From camera-usermanual.com Canon Manuals

Adjusting the Tone (White Balance)

Shooting Mode

Normally, the AWB (Auto) white balance setting selects an optimal white balance. When the AWB setting cannot produce natural looking colors, change the white balance using a setting appropriate for the light source.

1 FUNC. Menu ▶ AWB * (Auto).

See *Menus and Settings* (p. 22).

*Default setting.

- Use the ◀ or ▶ button to select a white balance setting and press the **FUNC./SET** button.

White Balance Settings

AWB	**Auto**	Settings are automatically set by the camera
	Day Light	For recording outdoors on a bright day
	Cloudy	For recording under overcast, shady or twilight skies
	Tungsten	For recording under tungsten and bulb-type 3-wavelength fluorescent lighting
	Fluorescent	For recording under warm-white, cool-white or warm-white (3-wavelength) fluorescent lighting
	Fluorescent H	For recording under daylight fluorescent, or daylight fluorescent-type 3-wavelength fluorescent lighting
	Custom	For recording with the optimal white balance data retained in the camera from a white-colored object, such as white paper or cloth

This setting cannot be adjusted when the My Colors mode is set to Se or BW.

Downloaded From camera-usermanual.com Canon Manuals

Using the Custom White Balance

You can set a custom white balance to obtain the optimal setting for the shooting conditions by having the camera evaluate an object, such as a piece of white paper or cloth, or a photo-quality gray card that you wish to establish as the standard white color.

In particular, take a custom white balance reading for the following situations that are difficult for the AWB (Auto) setting to detect correctly.

- Shooting close-ups
- Shooting subjects of monotone color (such as sky, sea or forest)
- Shooting with a peculiar source of light (such as a mercury-vapor lamp)

1 FUNC. Menu ▶ AWB* (Auto) ▶ (Custom).

See *Menus and Settings* (p. 22).

* Default setting.

2 Aim the camera at a piece of white paper or cloth and press (MENU).

- Ensure that the center frame is completely filled with the white image.

Downloaded From camera-usermanual.com Canon Manuals

- You are recommended to set the shooting mode to and the exposure compensation setting to [±0] before setting a custom white balance.
  The correct white balance may not be obtained when the exposure setting is incorrect (image appears completely black or white).
- Shoot with the same settings as when reading the white balance data. If the settings differ, the optimal white balance may not be set.
  In particular, the following should not be changed.
  - ISO Speed
  - Flash
    Setting the flash to on or off is recommended. If the flash fires when reading the white balance data with the flash set to (Auto), make sure that you also use the flash when you shoot.
- Since the white balance data cannot be read in Stitch Assist mode, preset the white balance in another shooting mode beforehand.

Downloaded From camera-usermanual.com Canon Manuals

Shooting in a My Colors Mode

Shooting Mode

You can change the look and feel of the pictures you take.

My Colors Settings

MY OFF	**My Colors Off**	Records normally with this setting.
MY V	**Vivid**	Emphasizes the contrast and color saturation to record bold colors.
MY N	**Neutral**	Tones down the contrast and color saturation to record neutral hues.
MY Se	**Sepia**	Records in sepia tones.
MY BW	**B/W**	Records in black and white.
MY P	**Positive Film**	Use this option to make red, green or blue colors more intense like the Vivid Red, Vivid Green or Vivid Blue effects. It can produce intense natural-appearing colors like those obtained with positive film.
MY L	**Lighter Skin Tone***	Use this option to make skin tones lighter.
MY D	**Darker Skin Tone***	Use this option to make skin tones darker.
MY B	**Vivid Blue**	Use this option to emphasize blue tints. It makes blue subjects, such as the sky or ocean, more vivid.
MY G	**Vivid Green**	Use this option to emphasize green tints. It makes green subjects, such as mountains, new growth, flowers and lawns, more vivid.
MY R	**Vivid Red**	Use this option to emphasize red tints. It makes red subjects, such as flowers or cars, more vivid.
MY C	**Custom Color**	Use this option to adjust the contrast, sharpness or saturation settings or the color balance between red, green, blue and skin tones*. It can be used to make subtle adjustments, such as making blue colors more vivid or face colors brighter.

* If the image contains colors that are the same as human skin, those colors will also be changed.

* You may not obtain the expected results depending on the skin color.

Downloaded by ron.cantu@gmail.com at Canon U.S.A., Inc.

1 FUNC. Menu ▶ * (My Colors Off).

See *Menus and Settings* (p. 22).

*Default setting.

- Use the ◆ or ◆ button to select a My Colors mode.
- **In**
  See *Setting the Camera to a Custom Color Mode* (p. 55).
- **When not in**
  Press the **FUNC./SET** button to return to the shooting screen.

2 Shoot.

Setting the Camera to a Custom Color Mode

This mode allows you to adjust the contrast, sharpness and saturation and the color balance for red, green, blue and skin tones.

1 FUNC. Menu ▶ * (My Colors Off) ▶ (Custom Color) ▶ (MENU).

See *Menus and Settings* (p. 22).

*Default setting.

2 Use the ◆ or ◆ button to select [Contrast], [Sharpness], [Saturation], [Red], [Green], [Blue] or [Skin Tone] and the ◆ or ◆ button to adjust the setting.

- The altered color will display.

Select a category — Adjust it

3 (FUNC/SET).

- This completes the setting.
- If you press the **MENU** button at this point, you will return to the screen where you can select a My Colors mode.

Downloaded From camera-usermanual.com Canon Manuals

Changing Colors

Shooting Mode

You can shoot images with the original colors transformed. This can be performed on movies as well as still images, allowing you to enjoy photographing with image or movie effects.

However, depending on the shooting conditions, the images may appear rough or you may not get the expected color. Before you try to photograph important subjects, we highly recommend that you shoot trial images and check the results.

If you set [Save Original] (p. 60) to [On] when shooting a still image, you can record the original image as well the transformed one.

	Color Accent	Use this option to have only the color specified in the LCD monitor remain and to transform all others to black and white.
	Color Swap	Use this option to transform a color specified in the LCD monitor into another. The specified color can only be swapped into one other color, multiple colors cannot be chosen.

The ISO speed will rise depending on the shooting conditions, which may increase the "noise" in the image.

Shooting in the Color Accent Mode

1 **Stills: FUNC. Menu ▶ *(Auto) ▶ (Color Accent).**

Movies: FUNC. Menu ▶ * (Standard) ▶ (Color Accent).

See *Menus and Settings* (p. 22).

*Default setting.



Stills

Movies

Downloaded From camera-usermanual.com Canon Manuals

2 FUNC. SET.

- The Color Accent mode will take effect.

3 **Hold down MENU.**

- The camera will switch to color input mode and the display will alternate between the original image and the color accent image (using the previously set color).

4 **Aim the camera so that the color you wish to retain appears at the center of the LCD monitor and press the ← button.**

- Only one color can be specified.
- You can use the ↑ or ↓ button to specify the range of colors that are retained.
  - -5: Only takes the color that you want to retain
  - +5: Also takes colors close to the one that you want to retain

5 **Press MENU to complete the setting, then shoot.**

- The default color accent is green.
- You may not obtain the expected results if you use the flash.
- The specified color accent is retained even if the camera's power is turned off.

Downloaded From camera-usermanual.com Canon Manuals

Shooting in the Color Swap Mode

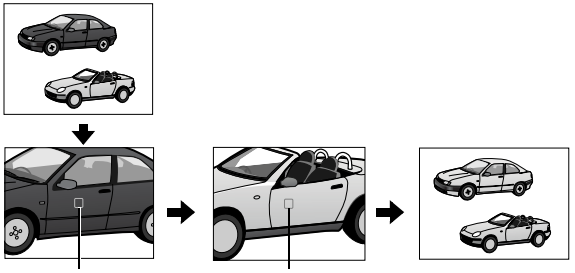

1 **Stills: FUNC. Menu ▶ *(Auto) ▶ (Color Swap).**

Movies: FUNC. Menu ▶ * (Standard) ▶ (Color Swap).

See *Menus and Settings* (p. 22).

*Default setting.



Stills

Movies

2 FUNC. SET.

- The Color Swap mode will take effect.

3 **Hold down MENU.**

- The camera will switch to color input mode and the display will alternate between the original image and the color swap image (using the previously set color).

Downloaded From camera-usermanual.com Canon Manuals

4 Aim the camera so that the original color appears at the center of the LCD monitor and press the ← button.

- Only one color can be specified.
- You can use the ↑ or ↓ button to specify the range of colors that are swapped.
  - -5: Only takes the color that you want to swap
  - +5: Also takes colors close to the one that you want to swap

5 Aim the camera so that the desired color appears at the center of the LCD monitor and press the → button.

- Only one color can be specified.

6 Press (MENU) to complete the setting, then shoot.

- The default setting for color swap mode changes green into white.
- You may not obtain the expected results if you use the flash.
- The colors specified in the color swap mode are retained even if the camera's power is turned off.

Downloaded From camera-usermanual.com Canon Manuals

Changing the Save Method for the Original Image

When shooting still images in the Color Accent or Color Swap mode, you can set whether or not to save the original image as well as the transformed one.

1 (Rec.) Menu ▶ [Save Original] ▶ [On]/[Off]*.

See *Menus and Settings* (p. 23).

*Default setting.

- If [On] is selected, the two images will be numbered consecutively with the altered image following the original.

When [Save Original] is Set to [On]

- Only the transformed image displays in the LCD monitor while shooting in the Color Accent or Color Swap mode.
- The transformed image is reviewed in the LCD monitor after shooting in the Color Accent or Color Swap mode. If you erase the image at this point, the original image is erased along with the transformed image. Exercise adequate caution before deleting a file.
- Since two images are recorded with each shot, the number of shots remaining is approximately half the number displayed when this function is set to [Off].

Downloaded From camera-usermanual.com Canon Manuals

Adjusting the ISO Speed

Shooting Mode

Raise the ISO speed to use a fast shutter speed when you wish to reduce the effects of camera shake or avoid blurry subjects, or to turn the flash off when shooting in a dark area.

1 FUNC. Menu ▶ ISO AUTO * (ISO Speed).

See *Menus and Settings* (p. 22).



*Default setting.

- Use the ◀ or ▶ button to select an ISO speed and press the **FUNC./ SET** button.
- Selecting [AUTO] sets the optimal ISO speed according to the light level when shooting. Since the ISO speed setting will automatically be raised in dark places, the camera will select a faster shutter speed and reduce the chances of camera shake.
- Selecting [HI]* sets the sensitivity to a higher value than the [AUTO] setting. This sets the shutter speed faster, reducing the potential for camera shake or blurry subjects compared with the [AUTO] setting.
  * Noise in the recorded image may be higher than for the [AUTO] setting.
- When in (Auto) shooting mode, only [AUTO] or [HI] can be selected.

The camera automatically applies noise reduction processing when you shoot at a high ISO speed.

Downloaded From camera-usermanual.com Canon Manuals

Setting the Auto Rotate Function

Shooting Mode

Your camera is equipped with an Intelligent Orientation sensor that detects the orientation of an image shot with the camera held vertically and automatically rotates it to the correct orientation when viewing it in the LCD monitor.

1 **(Set up) Menu ▶ [Auto Rotate] ▶ [On]*/ [Off].**

See *Menus and Settings* (p. 23).

*Default setting.

- Shooting with the Auto Rotate function is set to [On] and the [Shooting Info] is set to [On], (normal), (right end is down) or (left end is down) will appear in the display.



- This function may not operate correctly when the camera is pointed straight up or down. Check that the arrow is pointing in the right direction and if it is not, then set the Auto Rotate function to [Off].
- Even if the Auto Rotate function is set to [On], the orientation of images downloaded to a computer will depend upon the software used to download the images.

- When the camera is held vertically to shoot, the Intelligent Orientation sensor judges the upper end to be "up" and the lower end to be "down". It then regulates the optimal white balance, exposure and focus for vertical photography. This function operates regardless of the on/off status of the Auto Rotate function.

Downloaded From camera-usermanual.com Canon Manuals

Creating an Image Destination (Folder)

Shooting Mode

You can create a new folder at any time and the recorded images will be automatically saved to that folder.

Create New Folder	Creates a new folder the next time you shoot images. To create an additional folder, insert another check mark.
Auto Create	You can also specify a date and time if you wish to create a new folder using a shooting time after the specified date and time (p. 27).

Creates a folder the next time you shoot.

1 **(Set up) Menu ▶ [Create Folder].**

See *Menus and Settings* (p. 23).



2 **Use the ← or → button to add a check mark beside [Create New Folder] ▶ (MENU).**

- displays in the LCD monitor. The symbol will cease to display after the new folder is created.



Shooting

Downloaded From camera-usermanual.com Canon Manuals

Setting the Day or Time for Automatic Folder Creation

1 **(Set up) Menu ▶ [Create Folder].**

See *Menus and Settings* (p. 23).



2 **Select a day for the [Auto Create] option and a time in the [Time] option ▶ (MENU).**

- displays when the specified time arrives. The symbol will cease to display after the new folder is created.

Up to 2000 images can be saved into one folder. A new folder will automatically be created when you record more than that number even if you are not creating new folders.

Downloaded From camera-usermanual.com Canon Manuals

Resetting the File Number

Shooting Mode

The images you shoot are automatically assigned file numbers. You can select how the file number is assigned.

1 **(Set up) Menu ▶ [File Numbering] ▶ [Continuous]*/[Auto Reset].**

See *Menus and Settings* (p. 23).

*Default setting.



File Number Reset Function

Continuous	A number one higher than the last one recorded is assigned to the next image. This is convenient for managing all your images together on a computer because you avoid file name duplication when changing folders or memory cards.* *When a blank memory card is used. If a memory card with recorded data is used, the 7-digit number for the last recorded folder and image is compared with the last one on the card, and the larger of the two is utilized as the basis for new images.
Auto reset	The folder and image number are reset to the starting value (100-0001).* This is convenient for managing images on a folder-by-folder basis. *When a blank memory card is used. If a memory card with recorded data is used, the number following the 7-digit number for the last recorded folder and image on the card is utilized as the basis for new images.

Downloaded From camera-usermanual.com Canon Manuals

File and Folder Numbers

Recorded images are assigned consecutive file numbers starting with 0001 and ranging up to 9999, while folders are assigned numbers starting with 100 and ranging up to 999. Up to 2,000 images can be saved into a single folder.

	New Folder Created	Memory Card Exchanged for Another
Continuous	Memory Card 1 	Memory Card 1 Memory Card 2 
Auto Reset	Memory Card 1 	Memory Card 1 Memory Card 2 

- Images may be saved to a new folder when there is insufficient free space even if the total number of images in a folder is less than 2,000 because the following types of image are always saved together into the same folder.
  - Images from continuous shooting
  - Self-timer images (custom)
  - Stitch Assist mode images
  - Still images shot in Color Accent/Color Swap mode with the [Save Original] category set to [On]
- Images cannot be played back when the folder numbers are duplicated or image numbers are duplicated within folders.
- Please refer to the *Software Starter Guide* for information regarding folder structures or image types.

Downloaded From camera-usermanual.com Canon Manuals

Please also see the *Basic Camera User Guide* (p. 20).

Magnifying Images

1 Press the button.

- When the button is pressed, the image can be magnified up to 10 times. Pressing the button zooms out from the image.
- Pressing the ◀ or ▶ button moves to the previous or next image in the magnified state.

Approximate Location of the Displayed Area

2 Press (FUNC./SET) and change the position of the displayed portion with the ◀, ▶, ▲ or ▼ button.

- The SET icon will display and the display will change to the display position change mode. Pressing the **FUNC./SET** button again cancels the display position change mode.

To Cancel the Magnified Display
Hold down the **FUNC./SET** button. (You can also cancel it immediately by pressing the **MENU** button.)

Movie frames and index playback images cannot be magnified.

Downloaded From camera-usermanual.com Canon Manuals

Viewing Images in Sets of Nine (Index Playback)

1 **Hold down (FUNC. SET).**

- Up to nine images can be viewed at once.
- Use the ◀, ▶, ▲ or ▼ button to change the image selection.



To Return to Single Image Playback
Hold down the **FUNC./SET** button.

Downloaded From camera-usermanual.com Canon Manuals

Organizing Images by Category (My Category)

You can organize images into prepared categories (People, Scenery, Events, Category 1-3, To Do). At the category level, you can perform the following.

- Image searches (p. 70)
- Slide Show (p. 82)
- Protect (p. 87)
- Erase (p. 89)
- Configure print settings (p. 91)

1 **(Play) Menu ▶ .**

See Menus and Settings (p. 23).

- In Playback mode, you can press the button to display the screen in Step 2 directly.

2 **Use the ← or → button to select an image to classify and the ↑ or ↓ button to select a category and press the (FUNC. SET) button.**

- You can put the same image into more than one category.
- You can cancel the classification by pressing the **FUNC./SET** button again.

When working with images (for example, compiling a slide show, erasing or printing), it is convenient to categorize images in the [To Do] category.

Downloaded From camera-usermanual.com Canon Manuals

Jumping to Images

When you have many images recorded onto a memory card, it is handy to use the six search keys below to jump over images to find the object of your search.

	Shot Date	Jumps to the first image of each shooting date.
	My Category	Jumps to the first image in each category.
	Folder	Jumps to the first image in each folder.
	Movie	Jumps to a movie.
	By 10 images	Jumps over 10 images at a time.
	By 100 images	Jumps over 100 images at a time.

1 In single image playback mode, press and hold the (MENU) button.

- The camera will switch to jump search mode.

2 Use the ▲ or ▼ button to select a search key.

- The screen sample will vary slightly according to the search key.
- You can configure image information to show/hide in the (Set-up) Menu with the [Info Display] option (p. 26).

Image Information

3 Display the Images.

- /: press the ◀ or ▶ button.

Downloaded From camera-usermanual.com Canon Manuals

- : use the ◆ or ◆ button to select date, category, folder or movie for playback and press the **FUNC./SET** button.
  - The camera will switch to defined playback mode and play back only images corresponding to the search key.
  - Press and hold the **MENU** button to cancel defined playback mode.

Select the search key

To Return to Single Image Playback

Press the **MENU** button.

- The defined playback mode will be canceled under the following circumstances.
  - When newly saving images with effects added using the My Colors function, and edited movies
  - When images are deleted using [Erase] from the (Play) menu
- You cannot switch to the defined playback mode when classifying categories.

Downloaded From camera-usermanual.com Canon Manuals

Viewing Movies

Movies cannot be played in the index playback mode.

1 Display a movie and press (FUNC. SET).

- Images with a SET icon are movies.

2 Select (Play) and press (FUNC. SET).

- The movie will pause if you press the **FUNC./SET** button during playback. It will resume when you press the button again.
- When playback ends, the movie stops at the last frame displayed. Press the **FUNC./SET** button to display the movie control panel.
- You can configure image information to show/hide in the (Set-up) Menu with the [Info Display] option (p. 26).
- If playback was halted partway through in the prior viewing session, playback will resume from the last frame displayed.



Downloaded From camera-usermanual.com Canon Manuals

Operating the Movie Control Panel

	Ends playback and returns to single image playback
	Print (An icon will display when a printer is connected. See the *Direct Print User Guide* for details.)
	Play
	Slow Motion Playback (You can use the ◀ button to slow down or the ▶ button to speed up playback.)
	Displays the first frame
	Previous Frame (Rewinds if the **FUNC./SET** button is held down)
	Next Frame (Fast Forwards if the **FUNC./SET** button is held down)
	Displays the last frame
	Edit (Switches to movie editing mode) (p. 74)

- Use the television's controls to adjust the volume when playing a movie on a TV set (p. 97).
- The sound cannot be played in slow motion playback.

Downloaded From camera-usermanual.com Canon Manuals

Editing Movies

You can delete portions of recorded movies.

Protected movies and movies 1 second or less in duration cannot be edited.

1 Select (Edit) in the movie control panel and press (FUNC. SET).

- The movie editing panel and the movie editing bar will display.

2 Use the ▲ or ▼ button to select (Cut Beginning) or (Cut End) and the ◀ or ▶ button to specify the cut point( ).

- To check a temporarily edited movie, select (Play) and press the **FUNC./SET** button.
- Selecting (Exit) cancels the edit and restores the movie control panel.

3 Select (Save) and press (FUNC. SET).

Downloaded From camera-usermanual.com Canon Manuals

4 Select [New File] or [Overwrite] and press (FUNC. SET).

- [New File] saves the edited movie under a new file name. The pre-edit data is left unchanged.
  Note, if you press the **FUNC./SET** button while saving the movie, saving is canceled.
- [Overwrite] saves the edited movie with its original name. The pre-edit data is lost.
- When there is not enough space left on the memory card, only [Overwrite] can be selected.

It may take approximately 3 minutes to save an edited movie. If the battery runs out of charge partway through, edited movie clips cannot be saved. When editing movies, it is recommended to use a fully charged battery (*Basic Guide* p. 8).

Downloaded From camera-usermanual.com Canon Manuals

Rotating Images in the Display

Images can be rotated clockwise 90° or 270° in the display.



Original

90°

270°

1 **(Play) Menu ▶ .**

See *Menus and Settings* (p. 23).



2 **Use the ← or → button to select an image to rotate and press (FUNC. SET) to rotate it.**

- Cycle through the 90°/270°/original orientations with each press of the **FUNC./SET** button.
- This also can be set in the index playback mode.

When images are downloaded to a computer, the orientation of images rotated by the camera will depend upon the software used to download the images.

Downloaded From camera-usermanual.com Canon Manuals

Playback with Transition Effects

You can select the transition effect displayed when switching between images.

	Standard display.
	The displayed image darkens and the next image gradually brightens until it is displayed.
	Press the ◀ button to have the previous image display from the left and the ▶ button to have the next image display from the right.

1 **(Play) Menu** ▶ ▶ ▶ /*/ .

See Menus and Settings (p. 23).

*Default setting.



Downloaded From camera-usermanual.com Canon Manuals

Adding Effects with the My Colors Function

You can add effects to recorded images (stills only) using the My Colors function. The following selection of My Colors effects is available. For details, see p. 54.

V	Vivid	L	Lighter Skin Tone
N	Neutral	D	Darker Skin Tone
Se	Sepia	B	Vivid Blue
BW	B/W	G	Vivid Green
P	Positive Film	R	Vivid Red

1 **(Play) Menu ▶ .**

See Menus and Settings (p. 23).

2 **Use the ◆ or ◆ button to select an image and press (FUNC. SET).**

3 **Use the ◆ or ◆ button to select the My Colors type and press (FUNC. SET).**

- The displayed image will reflect the My Colors effect.
- You can press the [⊕] button to check the image at a higher magnification. While the image is zoomed, you can press the ◆ or ◆ button to switch between the image transformed with the My Colors effect and the original non-transformed image.

Downloaded From camera-usermanual.com Canon Manuals

4 **Select [OK] and press (FUNC. SET).**

- The newly saved image transformed with the My Colors effect will be the last one in the list.
- To continue adding effects to other images, repeat the procedures from Step 2 onward.

5 **Press (MENU) and select [Yes] or [No], then press (FUNC. SET).**

- Selecting [Yes] displays the image transformed with the My Colors effect, while [No] returns you to the Play menu.

- The My Colors function will not work if there is insufficient space on the memory card.
- Although My Colors effects can be added any number of times to an image, the image quality will gradually deteriorate with each application and the intended colors may not be achieved.
- Color in images taken using My Colors (p. 54) in shooting mode and images edited with the My Colors function in playback mode may differ slightly.

Downloaded From camera-usermanual.com Canon Manuals

Attaching Sound Memos to Images

In playback mode (including single image playback and index playback), you can attach sound memos (up to one minute) to an image. The sound data is saved in the WAVE format.

1 **(Play) Menu ▶ .**

See *Menus and Settings* (p. 23).

2 **Use the ← or → button to select an image to attach a sound memo to and press FUNC. SET.**

- The sound memo panel will display.

3 **Select (Record) and press FUNC. SET.**

- The elapsed time and the remaining time display.
- Pressing the **FUNC./SET** button pauses the recording. Pressing it again resumes recording.
- Up to one minute of recordings can be added to any one image.

Sound Memo Panel
Elapsed Time/ Remaining Time
Volume (Adjust with the ▲ or ▼ button)

Downloaded From camera-usermanual.com Canon Manuals

Sound Memo Panel

	Exit
	Record
	Pause
	Play
	Erase Select [Erase] in the confirmation screen and press the FUNC./SET button.

- You cannot attach sound memos to movies.
- Sound memos for protected images cannot be erased.

Downloaded From camera-usermanual.com Canon Manuals

Automated Playback (Slide Shows)

Automated playback of memory card images.

*Image settings for slide shows are based on the Digital Print Order Format (DPOF) standard (p. 91).

	All Images	Plays all images on a memory card in order.
	Date	Plays images bearing a specified date in order.
	My Category	Plays the images in the selected category in order.
	Folder	Plays images in a specified folder in order.
	Movies	Plays movie files only, in order.
	Stills	Plays still images only, in order.
1–3	**Custom 1–3**	Plays the images selected for each slide show, Custom 1, Custom 2 or Custom 3, in order (p. 85).

1 **(Play) Menu ▶ .**

See *Menus and Settings* (p. 23).

2 **Select , , , , , or 1–3.**

- , , : select a date, category or folder to be played back (p. 84).
- 1, 2, 3: select the images to be played back (p. 85).
- If you want to add a transition effect to play back images, use the ▲ button to select [Effect] and choose the type of effect with the ◀ or ▶ button (See the next page).

Downloaded From camera-usermanual.com Canon Manuals

3 **Select [Start] and press (FUNC. SET).**



- The following functions are available during slide shows.
  - Pausing/resuming the slide show: press the **FUNC./SET** button
  - Fast forwarding/rewinding the slide show: press the ◀ or ▶ button (continue to hold the button to switch between images more rapidly)
  - Stopping the slide show: press the **MENU** button.

Transition Effects

You can select the transition effect used when one image is replaced by another.

	Standard display.
	The new image gradually brightens as it moves upward from the bottom.
	The new image first appears in a cross shape and gradually expands to display the full image.
	Portions of the new image move horizontally, then the image expands to display the full image.

In single image playback mode, you can start a slide show from the current image displayed by holding the **FUNC./SET** button while you press the button. Please note that if you do this while the last image shot is displayed, the slide show will start from the first image using the same date.

Downloaded From camera-usermanual.com Canon Manuals

Select a date/category/folder to play back (/ /)

1 Select , or and press (FUNC SET).

2 Use the ← or → button to select a date/category/folder to play back and press the (MENU) button.

Date



My Category

Folder

Downloaded From camera-usermanual.com Canon Manuals

Selecting Images for Playback (★1–★3)

Select only the images that you wish to play back and save them as a slide show (Custom 1, 2 or 3). Up to 998 images can be selected. They will be played back in their order of selection.

1 Select ★1, ★2 or ★3 and press (FUNC. SET).

- Only the ★1 icon will display at first. When you set ★1, the icon will change to ★1 and ★2 will display. ★2 and ★3 will change in the same way when they are set.

2 Use the ← or → button to move between images for playback and press (FUNC. SET) to select or deselect them.

- You can also select images in the index playback mode.
- Pressing the **MENU** button completes the setting.



Selecting All Images

1 After selecting ★1–★3 in step 1, use the ↑ button to select [Mark all] and press the **FUNC./SET** button.
2 Use the ↑ button to select [Mark all], press the **FUNC./SET** button.
3 Use the → button to select [OK] and press the **FUNC./SET** button.

To deselect all images, select [Reset].

Downloaded From camera-usermanual.com Canon Manuals

Adjusting the Play Time and Repeat Settings

- **Play Time**

  Sets the duration that each image displays. Choose between 3*–10 seconds, 15 seconds and 30 seconds. Displaying time can vary slightly depending on the image.

  * Default setting.

- **Repeat**

  Sets whether the slide show stops when all the slides have been displayed or continues until stopped.

1 Select [Set up] and press (FUNC. SET).

2 Select [Play Time] or [Repeat] and then the desired option.

- Pressing the **MENU** button cancels the setting.

Downloaded From camera-usermanual.com Canon Manuals

Protecting Images

You can protect important images and movies from accidental erasure.

Select	You can configure the protection settings for each image singly while viewing them.
Select by Date	You can protect the images from a specified date.
Select by Category	You can protect the images in a specified category.
Select by Folder	You can protect the images in a specified folder.
All Images	You can protect all the images on a memory card.

1 **(Play) Menu ▶ .**

See *Menus and Settings* (p. 23).

2 **Select a menu item and press (FUNC. SET).**

- Proceed to Step 5 if you select [All Images].



Downloaded From camera-usermanual.com Canon Manuals

3 Select the image, date, category or folder to protect and press (FUNC. SET).

- **[Select]**
  Use the ◀ or ▶ button to select an image and press the **FUNC./SET** button.
  - Pressing the **FUNC./SET** button again cancels the setting.
  - You can also protect images in the index playback mode.
  - Press the **MENU** button to complete the setting.

Protection Icon

- **[Select by Date] [Select by Category] [Select by Folder]**
  Use the ▲ or ▼ button to select a date, category or folder and press the **FUNC./SET** button.
  - Pressing the **FUNC./SET** button again cancels the setting.
  - You can select multiple dates, categories or folders.
  - Use the ◀ or ▶ button to confirm each date, category or folder image.



4 For the [Select by Date], [Select by Category] and [Select by Folder] options, press (MENU).

5 Select [Protect] and press (FUNC. SET).

- Selecting [Unlock] cancels protection of the selected image and returns to Step 2.
- Selecting [Stop] cancels selection of the protected image and returns to Step 2.

Downloaded From camera-usermanual.com Canon Manuals

Erasing Images

You can erase images from a memory card.

Select	Erases images one at a time as you view them.
Select by Date	Erases images corresponding to the selected date.
Select by Category	Erases images in the selected category.
Select by Folder	Erases images in the selected folder.
All Images	Erases all images on a memory card.

- Note that erased images cannot be recovered. Exercise adequate caution before erasing an image.
- Protected images cannot be erased with this function.

1 **(Play) Menu ▶ .**

See *Menus and Settings* (p. 23).

2 **Select a menu item and press (FUNC. SET).**

- Proceed to Step 5 if you select [All Images].



Downloaded From camera-usermanual.com Canon Manuals

3 Select the image, date, category or folder and press (FUNC. SET).

- **[Select]**
  Use the ◀ or ▶ button to select an image and press the **FUNC./SET** button.
  - Pressing the **FUNC./SET** button again cancels the setting.
  - You can also erase images in the index playback mode.
- **[Select by Date] [Select by Category] [Select by Folder]**
  Use the ▲ or ▼ button to select a date, category or folder and press the **FUNC./SET** button.
  - Pressing the **FUNC./SET** button again cancels the setting.
  - You can select multiple dates, categories or folders.
  - Use the ◀ or ▶ button to confirm each date, category or folder image.

4 Press (MENU).

5 Select [OK] and press (FUNC. SET).

- Selecting [Stop] or [Cancel] cancels selection of the image you are about to erase and returns to Step 2.
- Pressing the **FUNC./SET** button while erasing is in progress cancels the procedure.



Please format the memory card when you want to erase not only image data but also all the data contained on the card (p. 29).

Downloaded From camera-usermanual.com Canon Manuals

Setting the DPOF Print Settings

You can select images on a memory card for printing and specify the number of print copies in advance using the camera. The settings used on the camera comply with the Digital Print Order Format (DPOF) standards. This is extremely convenient for printing on a direct print compatible printer, or for sending the images to a photo developing service that supports DPOF.

The ⚠ icon may display for a memory card with print settings set by a different DPOF-compliant camera. These settings will be overwritten by those set by your camera.

Select Images & Qty.	Configures print settings for single images as you view them.
Select by Date	Configures print settings for images corresponding to the selected date.
Select by Category	Configures print settings for images in the selected category.
Select by Folder	Configures print settings for images in the selected folder.
Select All Images	Configures print settings for all images.
Clear All Selections	Removes all print settings from images.

Only one copy will be printed for each selected image.
With the [Select Images & Qty.] option, you can only set the number of copies to print when the [Print Type] option is set to [Standard] or [Both].

Downloaded From camera-usermanual.com Canon Manuals

1 Slide the mode switch to ▶ (playback) ▶ (Print) Menu ▶ Select a menu item ▶ FUNC. SET.

See *Menus and Settings* (p. 23).

- Proceed to Step 4 if you select [Select All Images].



2 Select the image, date, category or folder to print and press FUNC. SET.

- **[Select Images & Qty.]**
  Selection methods differ for the Print Type settings (p. 94).

  - **(Standard)/(Both)**
    Use the ◀ or ▶ button to select an image, press the **FUNC./SET** button and use the ▲ or ▼ button to select the number of print copies (up to 99).
  - **(Index)**
    Use the ◀ or ▶ button to select an image and press the **FUNC./SET** button to select or deselect it.

  - You can also select images in the index playback mode.
  - Press the **MENU** button to complete the setting.

Number of Print Copies

Index Print Selection

Downloaded From camera-usermanual.com Canon Manuals

●**[Select by Date] [Select by Category] [Select by Folder]**
Use the ▲ or ▼ button to select a date, category or folder and press the **FUNC./SET** button.

- Pressing the **FUNC./SET** button again cancels the setting.
- You can select multiple dates, categories or folders.
- Use the ◀ or ▶ button to confirm each date, category or folder image.

3 For the [Select by Date], [Select by Category] and [Select by Folder] options, press (MENU).

4 Select [OK] and press (FUNC. SET).

●Selecting [Cancel] cancels print settings of the selected image and returns you to Step 1.



- The output of some printers or photo developing services may not reflect the specified print settings.
- Print settings cannot be set for movies.

- Images are printed in order according to the file number.
- A maximum of 998 images can be selected.
- If you are connected to a printer, the button will light blue while you are selecting images. You can start printing at this point by pressing the button, confirming that [Print] is selected and pressing the **FUNC./SET** button.

Downloaded From camera-usermanual.com Canon Manuals

Setting the Print Style

After setting the print style, select the image(s) to print. The following print settings can be selected.

*Default setting

Print Type	**Standard***	Prints one image per page.
	Index	Prints the selected images together at a reduced size in an index format.
	Both	Prints the images in both the standard and index formats.
Date (On/Off*)		Adds the date to the print.
File No. (On/Off*)		Adds the file number to the print.
Clear DPOF data (On*/Off)		Clears all print settings after the images print.

1 Slide the mode switch to (playback) ▶ (Print) Menu ▶ [Print Settings].

See *Menus and Settings* (p. 23).



2 Select [Print Type], [Date], [File No.] or [Clear DPOF data] and then specify the settings.

- The Date and File No. settings change according to the Print Type as follows.
  - Index
    [Date] and [File No.] cannot be set to [On] at the same time.
  - Standard or Both
    [Date] and [File No.] can be set to [On] at the same time, however, the printable information may vary between printers.

Downloaded From camera-usermanual.com Canon Manuals

- Images with date imprints created by (Postcard Date Imprint Mode) (p. 35) will have the date imprinted regardless of the [Date] setting. Accordingly, the date may be printed twice if [Date] is set to [On].
- Dates print in the style specified in the [Date/Time] menu (p. 27).

Setting the DPOF Transfer Settings

You can use the camera to specify settings for images before downloading to a computer. Refer to the *Software Starter Guide* for instructions on how to transfer images to your computer.

The settings used on the camera comply with the Digital Print Order Format (DPOF) standards.

The ⚠ icon may display for a memory card with transfer settings set by a different DPOF-compliant camera. These settings will be overwritten by those set by your camera.

Single Images

1 **(Play) Menu ▶ .**

See *Menus and Settings* (p. 23).



2 **Select [Order] and press (FUNC. SET).**

- Selecting [Reset] cancels all transfer order settings.

Downloaded From camera-usermanual.com Canon Manuals

3 Use the ← or → button to select an image to transfer and press (FUNC. SET).

- Pressing the **FUNC./SET** button again deselects the setting.
- You can also select images in the index playback mode.

Transfer Selection

All the Images on a Memory Card

1 (Play) Menu ▶ .

See *Menus and Settings* (p. 23).

2 Select [Mark all] and press (FUNC. SET).

- Selecting [Reset] cancels all transfer order settings.

3 Select [OK] and press (FUNC. SET).

- Images are transferred in order according to the file number.
- A maximum of 998 images can be selected.

Downloaded From camera-usermanual.com Canon Manuals

Viewing Images on a TV set

You can play back images on a television with the supplied AV cable.

1 **Turn off the Camera and the TV.**

2 **Plug the ends of the AV cable into the VIDEO IN and AUDIO IN jacks on the TV.**



3 **Connect the AV cable to the camera station's A/V OUT terminal (①), set the mode switch to ▶ (playback) (②), and place the camera securely into the camera station (③).**



4 **Turn on the TV and switch it to video mode.**

5 **Turn on the camera.**

- You can control the camera with the wireless controller (*Basic Guide* p. 6).

The video output signal can be switched (NTSC or PAL) to accommodate different regional standards (p. 27). The default setting varies between regions.

- NTSC: Japan, U.S.A., Canada, Taiwan and others
- PAL: Europe, Asia (excluding Taiwan), Oceania and others

If the video system is set incorrectly, the camera output may not display properly.

Downloaded From camera-usermanual.com Canon Manuals

Customizing the Camera (My Camera Settings)

My Camera allows you to customize the start-up image and start-up, operation, self-timer and shutter sounds. You can change and register these settings, enabling you to customize the camera to suit your own tastes.

Changing My Camera Settings

1 **(My Camera) Menu ▶ Menu item.**

See *Menus and Settings* (p. 23).



2 **Select the contents you wish to set.**

- Select [Theme] to set all to the same settings.



Downloaded From camera-usermanual.com Canon Manuals

Registering My Camera Settings

Images recorded onto the memory card and newly recorded sounds can be added as My Camera settings to the 2 and 3 menu items. You can also use the supplied software to upload your computer's images and sounds to the camera.

A computer is required to restore the My Camera settings to the defaults. Use the supplied software (ZoomBrowser EX/ ImageBrowser) to restore the default settings to the camera.

1 Slide the mode switch to ▶ (playback) ▶ (My Camera) Menu ▶ Menu item to register.

See *Menus and Settings* (p. 23).



2 Select 2 or 3 and press (FUNC SET).



Downloaded From camera-usermanual.com Canon Manuals

3 Select an image or record a sound.

- **Start-up Image**
  Use the ◀ or ▶ button to select the image you wish to register and press the **FUNC./SET** button.

- **Start-up, Operation, Self-timer and Shutter Sounds**
  Select (Record) and press the **FUNC./SET** button. After recording, select (Register) and press the **FUNC./SET** button.
  - Recording will automatically stop when the recording time elapses.
  - To play it, select (Play).
  - To exit instead of registering, press (Exit).

4 Select [OK] and press (FUNC SET).

- To cancel registering, select [Cancel].

- The following cannot be registered as My Camera settings.
  - Movies
  - Sounds recorded with the sound memo function (p. 80)
- The prior setting is erased when a new My Camera setting is added.

See the supplied *Software Starter Guide* for more information on creating and adding to the My Camera data.

Downloaded From camera-usermanual.com Canon Manuals

Camera

Camera will not operate.	
Power is not turned on.	●Press the power button (*Basic Guide* p. 12).
Memory card slot/battery cover is open.	●Confirm that the memory card slot/ battery cover is securely closed (*Basic Guide* p. 10).
Battery charge insufficient to operate camera ("Change the battery pack" message displays).	●Insert a fully charged battery into the camera (*Basic Guide* p. 8).
Poor contact between camera and battery terminals.	●Polish the terminals with a soft cotton swab before charging or using the battery (p. 115).
Sounds come from the camera interior.	
The camera's horizontal/ vertical orientation was changed.	●The camera's orientation mechanism is operating. There is no malfunction.

When the power is turned on

"Card locked!" message appears.	
The SD memory card's and SDHC memory card's write protect tab is set to "Write protect".	●When recording to, erasing from or formatting the SD memory card and SDHC memory card, slide the write protect tab upward (p. 117).
The Date/Time menu appears.	
The built-in rechargeable lithium battery charge is low.	●Recharge the built-in battery immediately (*Basic Guide* p. 11).

Downloaded From camera-usermanual.com Canon Manuals

LCD monitor

Camera screen is black at start-up	
Incompatible image has been selected as the start-up image in the My Camera settings.	●Change the start-up image in the My Camera settings (p. 98) or use the supplied software program ZoomBrowser EX or ImageBrowser to restore the default settings.
The display darkens.	
The image in the LCD monitor will darken in strong sunlight or bright light.	●This is a normal occurrence in devices containing CCDs and does not constitute a malfunction. (This image will not be recorded when shooting still images, but it will be recorded when shooting movies.)
Display flickers.	
Display flickers when shot under fluorescent lighting.	●This is not a camera malfunction (flickering recorded in movies, but not in still images).
A bar of light (red, purple) appears on the LCD monitor.	
This may occur when shooting a bright subject, such as the sun or a light.	●This is a normal occurrence in devices containing CCDs and does not constitute a malfunction. This bar of light will not be recorded when shooting still images, but it will be recorded when shooting movies.
appears.	
A slow shutter speed has likely been selected because of insufficient lighting.	●Raise the ISO speed (p. 61) or set the flash to any setting other than (flash off) (*Basic Guide* p. 16), or secure the camera to something, such as a tripod.

Downloaded From camera-usermanual.com Canon Manuals

⚠ appears.	
This displays when using a memory card that has print settings, transfer settings or slide show image selections set by other DPOF-compliant cameras.	●Take note that these settings will be overwritten by those set by your camera (p. 82, 91).
Noise displays./Subject's movements are irregular.	
Camera automatically lightened the image displayed on the LCD monitor to make it easier to see when shooting in a dark area (p. 13).	●There is no effect on the recorded image.

Shooting

Camera will not record.	
Mode switch is set to ▶ (playback).	●Set the mode switch to 📷 or 🎥 (*Basic Guide* p. 13).
Camera is in camera station.	●Remove the camera from the camera station.
Flash is charging.	●The indicator will light orange when it is charged. You can then shoot (*Basic Guide* p. 7).
Memory card is full.	●Insert a new memory card (*Basic Guide* p. 10). ●If required, download the images to a computer and erase them from the memory card to make space.
Memory card is not formatted correctly.	●Format the memory card (p. 29). ●If reformatting does not work, the memory card logic circuits may be damaged. Consult the nearest Canon Customer Support Help Desk.

Downloaded From camera-usermanual.com Canon Manuals

Camera will not record.	
SD memory card or SDHC memory card is write protected.	●Slide the write protect tab of the SD memory card or SDHC memory card upward (p. 117).
Image is blurred or out of focus.	
AF-assist Beam is set to [Off].	●In dark places where it is difficult for the camera to focus, the AF-assist Beam will emit to assist focusing. As the AF-assist Beam will not function when turned off, set it [On] to activate it (p. 24). Take care not to obstruct the AF-assist Beam with your hand when used.
The camera moves when the shutter button is pressed.	●Setting the self-timer to (2 seconds) delays the shutter release for 2 seconds and allows the camera to stop shaking, thus preventing a blurred image (*Basic Guide* p. 18). Even better results can be obtained by placing the camera on a stable surface or by using a tripod to shoot.
Subject is out of focal range.	●Shoot with the subject at the correct shooting distance (p. 123).
The subject is hard to focus on.	●Use the focus lock or AF lock to shoot (p. 45).

Downloaded From camera-usermanual.com Canon Manuals

Subject in recorded image is too dark.	
Insufficient light for shooting.	●Set the flash to (flash on) (*Basic Guide* p. 16).
The subject is underexposed because the surroundings are too bright.	●Set the exposure compensation to a positive (+) setting (p. 48). ●Use the spot metering function (p. 47).
Subject is too far away for flash to reach.	●Shoot within correct shooting distance of the subject when using the built-in flash (p. 124). ●Raise the ISO speed and then shoot (p. 61).
Subject in recorded image is too bright, or image flashes white.	
Subject is too close, making the flash too strong.	●Shoot within correct shooting distance of the subject when using the built-in flash (p. 124).
The subject is overexposed because the surroundings are too dark.	●Set the exposure compensation to a negative (-) setting (p. 48). ●Use the spot metering function (p. 47).
Too much light is shining directly into the camera, or is being reflected off the subject.	●Change the shooting angle.
Flash is set to on.	●Set the flash to (flash off) (*Basic Guide* p. 16).
Image contains noise.	
ISO speed is too high.	●Higher ISO speeds and the (High ISO Auto) setting may increase image noise. For higher image quality, select as low an ISO speed as possible (p. 61). ●In , , , , , and modes, the ISO speed increases and noise can appear.

Downloaded From camera-usermanual.com Canon Manuals

White dots appear on the image.	
Light from the flash has reflected off dust particles or insects in the air. This is particularly noticeable when shooting using the wide angle.	●This is a phenomenon that occurs with digital cameras and does not constitute a malfunction.
Eyes appear red.	
Light is reflected back from the eyes when the flash is used in dark areas.	●Set the [Red-Eye] function to [On] and shoot (p. 32). For this mode to be effective, the subject must be looking right at the red-eye reduction lamp. Try asking them to look directly at the lamp. Even better results can be obtained by increasing the lighting in indoor settings or approaching closer to the subject. The shutter will not activate for approximately 1 second after the red-eye reduction lamp fires in order to improve the effect.
Continuous shooting slows down.	
The memory card's performance has dropped.	●To enhance the continuous shooting performance, you are recommended to format (Low Level Format) the memory card in the camera after you save all its images to your computer (p. 29).
Recording images to memory card takes a long time.	
Memory card was formatted in another device.	●Use a memory card formatted in your camera (p. 29).
Lens will not retract.	
Memory card slot/battery cover was opened with power on.	●First close the memory card slot/ battery cover and then turn the power on and then off again. (*Basic Guide* p. 10).

Downloaded From camera-usermanual.com Canon Manuals

Shooting Movies

The recording time may not display properly or shooting may stop unexpectedly.

The following types of memory cards are used. - Slow recording cards. - Cards formatted on a different camera or a computer. - Cards which have had images recorded and erased repeatedly.	●Although the recording time may not display properly during shooting, the movie will be recorded correctly on the memory card. Recording time will display properly if you format the memory card in this camera (excluding slow recording memory cards) (p. 29).

"!" displayed on the LCD monitor in red and shooting automatically stopped.

There is insufficient free space in the camera's built-in memory.	● Try the following procedures. - Format the card with a low level format before shooting (p. 29). - Lower the recording pixels or frame rate (p. 41). - Use a high-speed memory card (SDC-512MSH, etc.).

Zoom does not operate.

Zoom button was pressed while shooting in movie mode.	●Operate the zoom before shooting in movie mode (*Basic Guide* p. 16). Note the digital zoom is available while shooting, but only in Standard movie mode (p. 33).

Downloaded From camera-usermanual.com Canon Manuals

Cannot play back.	
Poor connection between camera and camera station.	●Place the camera properly in the camera station.
You attempted to play back images shot with another camera or images edited with a computer.	●Computer images that cannot be played back will play back if they are added to the camera using the supplied software program ZoomBrowser EX or ImageBrowser.
File name was changed with a computer or file location was changed.	●Set the file name or location on the file format/structure of the camera. (Refer to the *Software Starter Guide* for details).
Movies cannot be edited.	
Some movies shot with another camera cannot be edited.	
Movies do not play back correctly.	
Movies recorded with high recording pixels and frame rates may momentarily stop playing if played on slow reading memory cards.	
You may experience frame dropping and audio breakup when playing back a movie on a computer with insufficient system resources.	
Movies recorded at the Fast Frame Rate setting and with the video signal set to the PAL format, may play back with a frame rate lower than the recorded one when output to a TV or video. You can play every frame by using the slow motion playback.	●To check the images at the original frame rate, you are recommended to play the movie back on the camera's LCD monitor or on a computer.

Downloaded From camera-usermanual.com Canon Manuals

Reading images from memory card is slow.	
Memory card was formatted in another device.	●Use a memory card formatted in your camera (p. 29).

Battery

Battery consumed quickly.	
Battery life exceeded if battery loses its charge quickly at normal temperature (23 °C/73 °F).	●Replace the battery with a new one (*Basic Guide* p. 8).
Battery will not charge.	
Battery life exceeded.	●Replace the battery with a new one (*Basic Guide* p. 8).
• Poor connection between camera and camera station. • Poor connection between battery and battery charger.	●Place the camera securely in the camera station or the battery securely in the battery charger.

TV monitor output

Image is distorted or not showing on TV monitor.	
Incorrect video system setting.	●Set the video system to the appropriate setting, NTSC or PAL, for your TV (p. 27).

Downloaded From camera-usermanual.com Canon Manuals

Printing on Direct Print Compatible Printers

Cannot print.	
Camera station and printer not properly connected.	●Attach the camera station to the printer securely with the supplied cable.
Printer power is off.	●Turn on the printer.
Incorrect print connection.	●In the (Set up) menu, select [Print Method] and select [Auto] (p. 27).

Downloaded From camera-usermanual.com Canon Manuals

List of Messages

The following messages may appear on the LCD monitor during shooting or playback. Please refer to the *Direct Print User Guide* for the messages that display during a printer connection.

Busy...

- Image is being recorded to, or read from, memory card. The playback mode is starting up.

No memory card

- You turned on the camera without a memory card installed, or with a memory card installed in the wrong orientation (*Basic Guide*, p. 10).

Card locked!

- The SD memory card or SDHC memory card is write-protected.

Cannot record

- You attempted to shoot an image without a memory card installed in the camera or with a memory card incorrectly installed in the wrong orientation, or you attempted to attach a sound memo to a movie.

Memory card error

- The memory card may be malfunctioning. Some malfunctioning memory cards may be fixed by formatting them in this camera. However, if this error message appears even when using the supplied memory card, contact your Canon Customer Support Help Desk as there may be a problem with the camera.

Memory card full

- Memory card is full of images and no more can be recorded or saved. Or no more image settings or sound memos can be recorded.

Downloaded From camera-usermanual.com Canon Manuals

Naming error!

- The file name could not be created because there is a file with the same name as the folder that the camera is attempting to create, or the highest possible file number has already been reached. In the Set up menu, set the File Numbering option to [Auto Reset]; alternatively, save all the images you wish to retain onto a computer, then reformat the memory card. Please note that formatting will erase all the existing images and other data.

Change the battery pack.

- Battery charge is insufficient to operate the camera. Replace it at once with a charged one or recharge the battery.

No image.

- No images recorded on memory card.

Image too large.

- You attempted to play back an image larger than 4992 x 3328 pixels or with a large data size.

Incompatible JPEG format.

- You attempted to play back an incompatible JPEG image (such as those edited on computers).

RAW

- You attempted to play back a RAW image.

Unidentified Image

- You attempted to play back a corrupted image, an incompatible image (proprietary format used by another manufacturer's camera, etc.), an image edited on a computer or a movie clip recorded by another camera.

Cannot magnify!

- You attempted to magnify an image recorded in a different camera or data type, an image edited with a computer, or a movie.

Downloaded From camera-usermanual.com Canon Manuals

Cannot rotate

- You attempted to rotate an image recorded in a different camera or data type, or an image edited with a computer.

Incompatible WAVE format.

- A sound memo cannot be added to this image since the data type of the existing sound memo is incorrect.

Cannot register this image!

- You attempted to register an image recorded in a different camera or a movie as a start-up image.

Cannot modify image

- You attempted to apply a My Colors effect to a movie or an image recorded in a different camera.

Cannot assign to category

- You attempted to categorize an image recorded in a different camera.

Cannot transfer!

- When transferring images to your computer using the Direct Transfer menu, you attempted to select an image with corrupted data or an image taken with a different camera or data type. You may have also attempted to select a movie when [Wallpaper] was selected in the Direct Transfer menu.

Protected!

- You attempted to erase or edit a protected image, movie or sound memo.

Too many marks.

- Too many images have been marked with print settings, transfer settings or slide show settings. Cannot process any more.

Downloaded From camera-usermanual.com Canon Manuals

Cannot complete!

- Could not save a part of the print, transfer or slide show settings.

Unselectable image.

- You attempted to set the print settings for a non-JPEG image.

Communication error

- The computer was unable to download the image due to the large amount of images (approx. 1000) stored on the memory card.

Lens error, restart camera

- Camera detected an error while moving the lens and cut the power automatically. This error message may appear if you press on the lens while it is moving or turn on the camera in a dusty or sandy environment. Turn on the camera again and shoot or playback images. Take the camera to a service center if this message appears frequently because there may be a problem with the lens.

Exx

- (xx: number) Camera detected an error. Turn the power off and then back on, then shoot or play back. A problem exists if the error code reappears. Note the number and contact your Canon Customer Support Help Desk. If an error code displays directly after taking a picture, the shot may not have been recorded. Check image in playback mode.

Downloaded From camera-usermanual.com Canon Manuals

Battery Handling

Battery Charge

The following icon and message will display.

Battery charge is low. Recharge it as soon as possible it will be used for an extended period.	**Change the battery pack** Battery charge is insufficient to operate the camera. Replace the battery immediately.

Battery Handling Precautions

- **Keep the battery terminals clean at all times.**
  Dirty terminals may cause poor contact between the battery and camera. Polish the terminals with a soft cotton swab before charging or using the battery.
- **At low temperatures, battery performance may be reduced and the low battery icon ( ) may appear earlier than usual.**
  Under these conditions, revive the battery by warming it in a pocket immediately before use.
- **However, ensure that there are no metallic items in the pocket that could cause a short circuit, such as a key ring, etc.**
  The battery may be short circuiting.
- **Do not allow any metal objects such as key rings to touch the (⊕) and (⊖) terminals (Fig. A). To carry the battery or store it during periods of disuse, always replace the terminal cover (Fig. B).**
  These conditions can damage the battery.

Fig. A

Fig. B

Downloaded From camera-usermanual.com Canon Manuals

You may be able to check the charge state depending upon how the terminal cover is attached (Fig. C, D).

Fig. C

Charged Battery
Attach it so the ▲ is visible

Fig. D

Spent Battery
Attach it the opposite way to Fig. C.

- **You are recommended to use it in the camera until it is completely discharged and to store it in an indoor location with low relative humidity and between the temperatures of 0 – 30 °C (32 – 86 °F).**
  Storing a fully charged battery for long periods of time (about one year) may shorten its life cycle or affect its performance. If you do not use the battery for long periods of time, charge it fully and discharge it fully in the camera about once a year before returning it to storage.

Charging the Battery

- **Use the supplied camera station and compact power adapter or Battery Charger CB-2LV/CB-2LVE (sold separately) to recharge Battery Pack NB-4L.**
- **Since this is a lithium-ion battery, you need not completely discharge it before recharging.**
- **It takes approximately 1 hour 30 minutes to fully charge the battery from a depleted state (based on Canon's testing standards).**
  - Charging it within a temperature range of 5 – 40 °C (41 – 104 °F) is recommended.
  - Charge times may vary according to the ambient temperature and the battery's charge state.
- **You are advised to charge the battery on the day of use, or one day before, to ensure a full charge.**
  Even charged batteries continue to discharge naturally.
- **If the performance of the battery diminishes substantially even when it is fully charged, its life has been exceeded and it should be replaced.**

Downloaded From camera-usermanual.com Canon Manuals

Handling the Memory Card

SD Memory Card and SDHC Memory Card Write Protect Tab


Write Protect Tab
Slide the switch up.
Slide the switch down (you can protect the images and other data on the card)
Writing/Erasing Possible
Writing/Erasing Impossible

Cautions When Handling

- **Memory cards are high-precision electronic devices. Do not bend them, apply force to them, or subject them to shocks or vibration.**
- **Do not attempt to disassemble or alter the memory card.**
- **Do not allow dirt, water or foreign objects to contact the terminals on the back of the card. Do not touch the terminals with your hands or metal objects.**
- **Do not peel away the original label on the memory card or cover it with another label or sticker.**
- **When writing on the memory card, do not use a pencil or ball-point pen. Only use a soft point pen (e.g. felt-tip pen).**
- **Do not use or store memory cards in the following locations.**
  - Locations subject to dust or sand
  - Locations subject to high humidity and high temperatures
- **Since some or all of the data recorded on the memory card may be corrupted or erased by electrical noise, static electricity, or camera or card malfunction, making a backup copy of important data is recommended.**

Downloaded From camera-usermanual.com Canon Manuals

Formatting

- **Please note that formatting (initializing) an memory card erases all data, including protected images.**
- **You are recommended to use memory cards that have been formatted in your camera.**
  - The card supplied with the camera may be used without further formatting.
  - When the camera is malfunctioning, a corrupted memory card might be the cause. Reformatting the memory card may solve the problem.
  - When a non-Canon brand memory card is malfunctioning, reformatting it may solve the problem.
  - Memory cards formatted in other cameras, computers, or peripheral devices may not operate correctly in this camera. When that happens, reformat the memory card with this camera.
- **If formatting in the camera does not work properly, turn the camera off and re-insert the memory card. Then turn the camera back on and format again.**
- **Data on a card is not completely erased even when the card is formatted or images are erased because these processes merely change the file management data. Please note this fact when transferring ownership or disposing of cards. Take care to destroy the card when disposing of it to prevent the leakage of personal data.**

Downloaded From camera-usermanual.com Canon Manuals

Using the Battery Charger (Sold Separately)

You can recharge the battery using Battery Charger CB-2LV/CB-2LVE (sold separately).

1 Insert the battery pack into the battery charger.

Align the ▲ on the battery and battery charger and insert it correctly.



2 Battery charger model names and types vary by region.

(For CB-2LV)
Plug the battery charger into a power outlet.

(For CB-2LVE)
Attach the power cord to the battery charger and plug it into a power outlet.



- The charge indicator will light orange while the battery is charging. It will change to green when the charge is complete.
- After charging, unplug the battery charger and immediately remove the battery.

To protect the battery and prolong its life, do not charge it for longer than 24 hours continuously.

It takes approximately 1 hour 30 minutes to fully charge the battery from a depleted state (based on Canon's testing standards).

- Charging it within a temperature range of 5 – 40 °C (41 – 104 °F) is recommended.
- Charge times may vary according to the ambient temperature and the battery's charge state.

Downloaded From camera-usermanual.com Canon Manuals

Using an Externally Mounted Flash (Sold Separately)

High-Power Flash HF-DC1

This flash is used to supplement the camera's built-in flash when the subject is too far away for proper illumination. Use the following procedures to affix the camera and High-Power Flash to the supporting bracket.

Please read the instructions accompanying the flash along with this explanation.

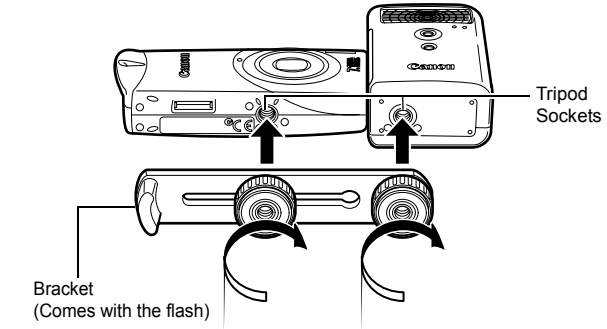

- The flash charge time will lengthen as the battery charge gets weaker. Always set the power/mode switch to [OFF] when you finish using the flash.
- Be careful not to touch the flash window or sensor windows with your fingers while the flash is in use.
- The flash may fire if another flash is being used in close proximity.
- The High-Power Flash may not fire outdoors in daylight or when there are no reflective items.
- For continuous shooting, although the flash fires for the first shot, it does not fire for subsequent shots.
- Fasten the attachment screws securely so that they do not loosen. Failure to do so may lead to the dropping of the camera and flash resulting in damage to both.

Downloaded From camera-usermanual.com Canon Manuals

- Before attaching the bracket to the flash, check that the lithium battery (CR123A or DL123) is installed.
- To illuminate the subjects properly, install the flash so that it is up against the side of the camera and parallel with the camera's front panel.
- A tripod can be used even when the flash is attached.

Batteries

●Charge becomes Severely Limited

If the battery usage time has considerably diminished, wipe the battery terminals well with a dry cloth. The terminals may be dirty from fingerprints.

●Usage in Cold Temperatures

Get a spare generic lithium battery (CR123A or DL123). You are recommended to place the spare battery in your pocket to warm it up before switching it for the battery in the flash.

●Non-Use over Extended Periods

Leaving batteries in the High-Power Flash could allow the battery fluid to leak, damaging the product. Remove the batteries from the High-Power Flash and store them in a cool, dry place.

Downloaded From camera-usermanual.com Canon Manuals

Camera Care and Maintenance

Never use thinners, benzine, synthetic cleansers or water to clean the camera. These substances may distort or damage the equipment.

Camera Body

Gently wipe dirt off the camera body with a soft cloth or eyeglass lens wiper.

Lens

First use a lens blower brush to remove dust and dirt, then remove any remaining dirt by wiping the lens lightly with a soft cloth.

Owing to its construction, the lens will retract slightly when wiped. This does not constitute a malfunction, however, be careful not to let dust and dirt into the body while it is in this state.

Never use synthetic cleansers on the camera body or lens. If dirt remains, contact the closest Canon Customer Support Help Desk as listed on rear of this booklet or the European Warranty System (EWS) Booklet.

LCD Monitor

Use a lens blower brush to remove dust and dirt. If necessary, gently wipe with a soft cloth or an eyeglass lens wiper to remove stubborn dirt.

Never rub or press strongly on the LCD monitor. These actions may damage it or lead to other problems.

Downloaded From camera-usermanual.com Canon Manuals

Specifications

All data is based on Canon's standard testing methods. Subject to change without notice.

DIGITAL IXUS i^7 zoom

(W): Max. wide angle (T): Max. telephoto

Camera Effective Pixels	Approx. 7.1 million
Image Sensor	1/2.5-inch CCD (Total number of pixels: Approx. 7.4 million)
Lens	6.3 (W) – 14.9 (T) mm (35mm film equivalent: 38 (W) – 90 (T) mm) f/3.2 (W) – f/5.4 (T)
Digital Zoom	Approx. 4.0x (Up to approx. 10x in combination with the optical zoom)
LCD Monitor	1.8-inch, low-temperature polycrystalline silicon TFT color LCD, approx. 118,000 pixels (Picture coverage 100%)
AF System	TTL autofocus AiAF (Face Detect/9-point)/AF (1-point fixed to center)
Shooting Distance (From the front of the lens)	Normal: 30 cm (12 in.) – infinity Macro: 30 – 50 cm (W)/10 – 50 cm (T) (12 in. – 1.6 ft. (W)/3.9 in. – 1.6 ft. (T))
Shutter	Mechanical shutter + electronic shutter
Shutter Speeds	15 – 1/1600 sec. The shutter speed varies according to the shooting mode. Slow shutter speeds of 1.3 sec. or slower operate with noise reduction.
Metering System	Evaluative, Center-weighted average or Spot (fixed to center)
Exposure Compensation	± 2 stops in 1/3-stop increments
ISO Speed*1	Auto*2, High ISO Auto*2, ISO 80/100/200/400/800/1600 *1 Standard Output Sensitivity, Recommended Exposure Index. *2 Camera automatically sets the optimal speed.

Downloaded From camera-usermanual.com Canon Manuals

White Balance	Auto, Day Light, Cloudy, Tungsten, Fluorescent, Fluorescent H or Custom
Built-in Flash	Auto*, On*, Off * Red-eye reduction and slow synchro available
Flash Range	Normal: 30 cm – 2.0 m (12 in. – 6.6 ft.) (W), 30 cm – 1.3 m (12 in. – 4.3 ft.) (T) (When ISO speed is set to AUTO.)
Shooting Modes (Still images)	Auto, Manual[1], Portrait, Landscape, Night Snapshot, Color Accent, Color Swap, Scene Mode[2], Stitch assist[3] 1 Long shutter mode available 2 Kids&Pets, Indoor, Foliage, Snow, Beach, Fireworks, Aquarium, Underwater 3 Selectable in Manual mode.
(Movies)	Standard, Fast Frame Rate, Compact, Color Accent, Color Swap
Continuous Shooting	Approx. 1.6 shots/sec. (Large/Fine mode)
Self-timer	Activates shutter after an approx. 10-sec./ approx. 2-sec. delay, Custom Timer
Recording Media	SD memory card/SDHC memory card/ MultiMediaCard
File Format	Design rule for camera file system and DPOF compliant
Data Type (Still images)	Exif 2.2 (JPEG)* Sound memos: WAVE (Monaural)
(Movies)	AVI (Image data: Motion JPEG; Audio data: WAVE (Monaural)) * This digital camera supports Exif 2.2 (also called “Exif Print”). Exif Print is a standard for enhancing the communication between digital cameras and printers. By connecting to an Exif Print-compliant printer, the camera’s image data at the time of shooting is used and optimized, yielding extremely high quality prints.
Compression	Superfine, Fine, Normal

Downloaded From camera-usermanual.com Canon Manuals

Number of Recording Pixels (Still Images)	Large: 3072 x 2304 pixels Medium 1: 2592 x 1944 pixels Medium 2: 2048 x 1536 pixels Medium 3: 1600 x 1200 pixels Small: 640 x 480 pixels Postcard: 1600 x 1200 pixels Widescreen: 3072 x 1728 pixels
Number of Recording Pixels (Movies)	Standard, Color Accent, Color Swap: 640 x 480 pixels (30 frames/sec., 15 frames/sec.) 320 x 240 pixels (30 frames/sec., 15 frames/sec.) Recording can continue until the memory card is full* (can record up to a maximum of 4 GB** at one time). Fast Frame Rate: (can record for 1 min.) 320 x 240 pixels (60 frames/sec.) Compact: (can record for 3 min.) 160 x 120 pixels (15 frames/sec.) * Using super high-speed memory cards (SDC-512MSH recommended). **Even if the clip size has not reached 4 GB, recording will stop at the moment the clip length reaches 1 hour. Depending on the volume and data writing speed of the memory card, recording may stop before reaching 1 hour or before the recorded data volume has reached 4 GB.
Playback Modes	Single (histogram displayable), Index (9 thumbnail images), Magnified (approx. 10x (max.) in LCD monitor, advance or reverse through magnified images possible), My Category, Jump (jumps to every tenth or hundredth image, to the first image of those sharing a certain shooting date, to the first image of each category, to the first image in a folder or movies. Sound memos (up to 1 min.), Slide show, My Colors or Movie (edit/slow motion play back possible).
Direct Print	*PictBridge* compliant, and *Canon Direct Print* and *Bubble Jet Direct* compatible
My Camera Settings	Start-up image, start-up sound, operation sound, self-timer sound, and shutter sound.
Interface	Camera Station Connector

Downloaded From camera-usermanual.com Canon Manuals

Power Source	Battery Pack NB-4L (Rechargeable lithium-ion battery) Compact Power Adapter CA-DC20/CA-DC20E
Operating Temperatures	0 – 40 °C (32 – 104 °F)
Operating Humidity	10 – 90%
Dimensions (Excluding protrusions)	96.1 × 45.1 × 23.9 mm (3.78 × 1.78 × 0.94 in.)
Weight (camera body only)	Approx. 105 g (3.70 oz.)
Other	Camera Station with Wireless Controller for playback (*Basic Guide* p. 4).

Downloaded From camera-usermanual.com Canon Manuals

Battery Capacity (Battery Pack NB-4L (Fully charged))

Number of Images Shot (Based on the CIPA standard)	Playback Time
Approx. 190 images	Approx. 5 hours

- The actual figures will vary according to the shooting conditions and settings.
- Movie data is excluded.
- At low temperatures, the battery performance may diminish and the low battery icon may appear very rapidly. In these circumstances, the performance can be improved by warming the battery in a pocket before use.

Test Conditions

Shooting: Normal temperature (23 °C ± 2 °C/73 °F ± 3.6 °F), normal relative humidity (50% ± 20%), alternating wide angle end and telephoto end shots at 30 second intervals with the flash fired once every two shots and the camera power turned off after every tenth shot. Power is left off for a sufficient amount of time*, then the power is turned back on and the testing procedure is repeated.

- A Canon-brand memory card is used.

*Until the battery returns to normal temperature

Playback: Normal temperature (23 °C ± 2 °C/73 °F ± 3.6 °F), normal relative humidity (50% ± 20%), continuous playback at 3 seconds per image.

See *Battery Handling Precautions* (p. 115).

Downloaded From camera-usermanual.com Canon Manuals

Memory Cards and Estimated Capacities

: Card included with the camera

Recording Pixels	Compression	16MB	SDC-128M	SDC-512MSH
L (Large) 3072 x 2304 pixels	S	4	40	156
		7	64	251
		16	134	520
M1 (Medium 1) 2592 x 1944 pixels	S	5	49	190
		10	87	339
		21	173	671
M2 (Medium 2) 2048 x 1536 pixels	S	9	76	295
		16	136	529
		33	269	1041
M3 (Medium 3) 1600 x 1200 pixels	S	14	121	471
		26	217	839
		50	411	1590
S (Small) 640 x 480 pixels	S	56	460	1777
		88	711	2747
		138	1118	4317
(Postcard) 1600 x 1200 pixels		26	217	839
W (Widescreen) 3072 x 1728 pixels	S	6	53	207
		10	86	335
		21	177	686

- Capable of smooth continuous shooting (p. 34) when card has been formatted with a low level format.
- This reflects standard shooting criteria established by Canon. Actual results may vary according to the subject and shooting conditions.

Downloaded From camera-usermanual.com Canon Manuals

Movie

	Recording Pixels	Frame Rate	16MB	SDC-128M	SDC-512MSH
Standard	640 (640 x 480 pixels)	30	7 sec.	1 min. 4 sec.	4 min. 9 sec.
		15	15 sec.	2 min. 7 sec.	8 min. 14 sec.
Color Accent	320 (320 x 240 pixels)	30	22 sec.	3 min. 1 sec.	11 min. 42 sec.
Color Swap		15	43 sec.	5 min. 55 sec.	22 min. 53 sec.
Fast Frame Rate	320 (320 x 240 pixels)	60	11 sec.	1 min. 32 sec.	5 min. 59 sec.
Compact	160 (160x 120 pixels)	15	1 min. 47 sec.	14 min. 29 sec.	55 min. 57 sec.

* Maximum movie clip length at : 1 min., : 3 min. The figures indicate the maximum continuous recording time.

Downloaded From camera-usermanual.com Canon Manuals

Image Data Sizes (Estimated)

Recording Pixels	Compression		
	S		
L (3072 x 2304 pixels)	3045 KB	1897 KB	902 KB
M1 (2592 x 1944 pixels)	2503 KB	1395 KB	695 KB
M2 (2048 x 1536 pixels)	1602 KB	893 KB	445 KB
M3 (1600 x 1200 pixels)	1002 KB	558 KB	278 KB
S (640 x 480 pixels)	249 KB	150 KB	84 KB
(1600 x 1200 pixels)	–	558 KB	–
W (3072 x 1728 pixels)	2304 KB	1420 KB	678 KB

	Recording Pixels	Frame Rate	File size
Standard	640 (640 x 480 pixels)	30	1920 KB/sec.
		15	960 KB/sec.
Color Accent	320 (320 x 240 pixels)	30	660 KB/sec.
Color Swap		15	330 KB/sec.
Fast Frame Rate	320 (320 x 240 pixels)	60	1320 KB/sec.
Compact	160 (160 x 120 pixels)	15	120 KB/sec.

Downloaded From camera-usermanual.com Canon Manuals

MultiMediaCard

Interface	Compatible with MultiMediaCard standards
Dimensions	32.0 x 24.0 x 1.4 mm (1.3 x 0.9 x 0.06 in.)
Weight	Approx. 1.5 g (0.05 oz.)

SD Memory Card

Interface	Compatible with SD memory card standards
Dimensions	32.0 x 24.0 x 2.1 mm (1.3 x 0.9 x 0.1 in.)
Weight	Approx. 2 g (0.07 oz.)

Battery Pack NB-4L

Type	Rechargeable lithium-ion battery
Nominal Voltage	3.7 V DC
Typical Capacity	760 mAh
Cycle Life	Approx. 300 times
Operating Temperatures	0 – 40 °C (32 – 104 °F)
Dimensions	35.4 x 40.3 x 5.9 mm (1.39 x 1.59 x 0.23 in.)
Weight	Approx. 17 g (0.60 oz.)

Camera Station CS-DC1a

Input/Output Connector	Camera Connector, DIGITAL Terminal: USB 2.0 Hi-Speed (mini-B), PTP (Picture Transfer Protocol), Audio/Video output (NTSC or PAL selectable with camera), DC IN (power input) socket
Rated Input	5.0 V DC, 0.7 A
Rated Output	5.0 V DC, 0.7 A
Operating Temperatures	0 – 40 °C (32 – 104 °F)
Dimensions	121.8 x 27.1 x 51.0 mm (4.80 x 1.07 x 2.01 in.)
Weight	Approx. 38 g (1.34 oz.) (Body only)
Remarks	Remote sensor (playback-only wireless controller), charge lamp

Downloaded From camera-usermanual.com Canon Manuals

Compact Power Adapter CA-DC20/CA-DC20E

Rated Input	100 – 240 V AC (50/ 60 Hz) 100 mA (CA-DC20) 100 mA (CA-DC20E)
Rated Output	5.0 V DC, 0.7 A
Operating Temperatures	0 – 40 °C (32 – 104 °F)
Dimensions	CA-DC20 49.4 x 53.4 x 20.5 mm (1.94 x 2.10 x 0.81 in.) CA-DC20E 28.0 x 78.0 x 21.0 mm (1.10 x 3.07 x 0.83 in.)
Weight	CA-DC20 Approx. 92 g (3.25 oz.) CA-DC20E Approx. 75 g (2.65 oz.) (excluding power cord)

Wireless Controller WL-DC200

Means of communication	Infrared
Coverage	5 meters (16 ft.) or more (front)
Directivity	15 degrees to the left or right over 3 meters (9.8 ft.) or more; 15 degrees upward or downward over 1.2 meters (3.9 ft.) or more
Power Supply	Coin-type lithium battery CR2025
Operating Temperatures	0 – 40 °C (32 – 104 °F)
Dimensions	35.0 x 56.6 x 6.5 mm (1.38 x 2.23 x 0.26 in.)
Weight	Approx. 9.0 g (0.32 oz.) (Body only)
Remarks	Playback-only

Downloaded From camera-usermanual.com Canon Manuals

Battery Charger CB-2LV/CB-2LVE (Sold Separately)

Rated Input	100 – 240 V AC (50/60 Hz)
Rated Output	4.2 V DC, 0.65 A
Charging Time	Approx. 1 hour 30 minutes
Operating Temperatures	0 – 40 °C (32 – 104 °F)
Dimensions	53.0 x 86.0 x 19.5 mm (2.09 x 3.39 x 0.77 in.)
Weight	Approx. 60 g (2.12 oz.) (CB-2LV) Approx. 55 g (1.94 oz.) (CB-2LVE) (excluding power cord)

Downloaded From camera-usermanual.com Canon Manuals

INDEX

Numerics

3:2 Guide 36

A

AF Frame 14, 44
AF Lock 46
AF-assist Beam 24
AiAF 44
Auto Play (Slide Show) 82
Auto Rotate Function 62

B

Battery
- Battery Capacity 127
- Charging ..... 116, *Basic* 8
- Handling 115
- Installing ..... *Basic* 8

Battery Charger (Sold Separately) 119

C

Camera Station ..... *Basic* 4
Category 69
Clock Display 13
Compact Power Adapter *Basic* 9
Compression 30
Continuous Shooting 34
Create Folder 63
Custom White Balance 52

D

Date Imprint Mode 35
Date/Time
- Setting ..... *Basic* 11
- Using the Clock 13
- World Clock 20

DIGITAL Terminal .... *Basic* 4, 28
Digital Zoom 33
Direct Transfer ..... *Basic* 31
Downloading Images to a Computer ..... *Basic* 25
DPOF Print Order
- Print Style 94
- Selecting Images 91
- DPOF Transfer Order 95

E

Erasing
- All Images 89
- Single Images ..... *Basic* 3, 20

Exposure 48

F

File Number 65
Flash ..... *Basic* 3, 16
Focus 44
Focus Lock 45
Frame Rate 41
FUNC. Menu 22
FUNC./SET button ..... *Basic* 3

G

Grid Lines 36

H

HF-DC1 120
Histogram 18

I

Image Data Sizes (Estimated) 130
Index Playback 68
Interface Cable ..... *Basic* 23, 27
ISO Speed 61

J

JUMP (Image Search) 70

L

Language ..... *Basic* 11
LCD Monitor
- Night Display 13
- Playback Information 16
- Shooting Information 14
- Using the LCD Monitor 12

M

Macro ..... *Basic* 3, 17
Magnifying 67
Memory Card
- Estimated Capacities 128

Downloaded From camera-usermanual.com Canon Manuals

Formatting 29, 118
Handling 117
Inserting..... *Basic* 10
Menu
FUNC. Menu 22, 24
Menu List..... 24
Menus and Settings..... 22
My Camera Menu..... 28
Play Menu 25
Print Menu 25
Rec. Menu 24
Set up Menu 26
MENU button..... *Basic* 3
Messages 111
Metering Modes..... 47
Mode Switch..... *Basic* 3, 12, 13
Movie
Editing 74
Playback..... 72
Shooting 38
Mute..... 26, *Basic* 12
My Camera Menu 28
My Camera Settings..... 98
My Category 69
My Colors (Playback) 78
My Colors (Shooting)..... 54

P

Playback..... *Basic* 20
Postcard Mode 35
Power Button..... *Basic* 3, 12
Power Saving 19, 26
Print/Share Button *Basic* 3, 23, 31
Printing ..... *Basic* 23
Protect 87

R

Recording Pixels..... 30, 41
Red-Eye..... 32, *Basic* 1
Reset All 28
Review..... 24
Rotate..... 76

S

Self-Timer..... *Basic* 18
Set up Menu 26
Shooting Mode
Auto ..... *Basic* 14
Color Accent ..... 56, *Basic* 14
Color Swap ..... 58, *Basic* 14
Landscape ..... *Basic* 14
Manual ..... *Basic* 14
Movie ..... 38, *Basic* 15
Night Snapshot ..... *Basic* 14
Portrait ..... *Basic* 14
Scene Mode
Aquarium ..... *Basic* 15
Beach..... *Basic* 15
Fireworks ..... *Basic* 15
Foliage..... *Basic* 14
Indoor..... *Basic* 14
Kids&Pets ..... *Basic* 14
Snow..... *Basic* 14
Underwater ..... *Basic* 15
Selecting ..... *Basic* 13
Stitch Assist ..... 42, *Basic* 14
Shutter Button..... *Basic* 3
Fully ..... *Basic* 13
Halfway ..... *Basic* 12
Shutter Speed 49
Slide Show 82
Repeat Settings 86
Selecting 85
Transition Effects 83
Slow Synchro..... 32
Smooth Continuous Shooting 34
Sound Memo..... 80
Spot AE Point Frame 47
Spot Frame 14
System Requirements.. *Basic* 26

T

Telephoto..... *Basic* 16
Time Zone..... 20, 27
Transition Effects
Playback 77
Slide Show..... 83

V

Vertical Shutter Release .. 24, 37
Video System..... 97

W

White Balance..... 51
Wide Angle..... *Basic* 16
Wireless Controller..... *Basic* 6

Downloaded From camera-usermanual.com Canon Manuals

Wrist Strap ..... *Basic* 1

Z

Zoom..... *Basic* 16

Downloaded From camera-usermanual.com Canon Manuals

Disclaimer

- While every effort has been made to ensure that the information contained in this guide is accurate and complete, no liability can be accepted for any errors or omissions.
- Canon reserves the right to change the specifications of the hardware and software described herein at anytime without prior notice.
- No part of this guide may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form, by any means, without the prior written permission of Canon.
- Canon makes no warranties for damages resulting from corrupted or lost data due to a mistaken operation or malfunction of the camera, the software, SD memory cards (SD cards), personal computers, peripheral devices, or use of non-Canon SD cards.

Trademark Acknowledgments

- Macintosh, Mac OS and QuickTime are trademarks of Apple Computer Inc., registered in the United States and/or other countries.
- Microsoft® and Windows® are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
- The SDHC logo is a trademark.

Copyright © 2006 Canon Inc. All rights reserved.

Downloaded From camera-usermanual.com Canon Manuals

Functions Available in Each Shooting Mode

The chart below is a reference for the settings available for various shooting conditions. The settings selected in each shooting mode are saved after you finish shooting.

Function									Page
Recording Pixels	Large L	●	●	●	●	▲	–		
	Medium 1 M1	❍	❍	❍	❍	△	–		
	Medium 2 M2	❍	❍	❍	❍	△	–		
	Medium 3 M3	❍	❍	❍	❍	△	–		p. 30
	Small S	❍	❍	❍	❍	△	–		
	Postcard	❍	❍	❍	❍	–	–		
	Widescreen W	❍	❍	❍	❍	–	–		
	Movie	–	–	–	–	–	❍(1)		p. 41
Compression	Super Fine S	❍	❍	❍	❍	△	–		
	Fine	●	●	●	●	▲	–		p. 30
	Normal	❍	❍	❍	❍	△	–		
Frame Rate		–	–	–	–	–	❍(2)		p. 41
Flash	Auto	●	❍	❍	❍(3)(4)	–	–		
	On	–	❍	❍	❍(4)	△	–		*Basic* p. 16
	Off	❍	●	●	❍(3)	▲	–		
Slow Synchro		–	❍	–	–	△	–		p. 32
Red-Eye		❍	❍	❍	❍(4)	△	–		p. 32
Macro Mode		❍	❍	❍	❍(5)	△	❍		Basic p. 17
AF Lock		–	❍	–	–	–	❍(6)		p. 45
Shooting Method	Single Shot	●	●	●	●	●	●		–
	Continuous	–	❍	–	❍	–	–		p. 34
	10 sec. Self-Timer	❍	❍	❍	❍	❍	❍		*Basic* p. 18
	2 sec. Self-Timer	❍	❍	❍	❍	❍	❍		
	Custom Timer	❍	❍	–	❍	–	–		
Autofocus Modes		❍	❍	❍	❍(7)	–	–		p. 44
AF-assist Beam		❍	❍	❍	❍(4)	△	❍		p. 24
Digital Zoom		❍	❍	–	❍	–	❍(8)		p. 33

Downloaded From camera-usermanual.com Canon Manuals

Function								Page
Metering Method	Evaluative	❍	●	❍	❍	❍	❍	p. 47
	Center Weighted Avg.	–	❍	–	–	–	–	
	Spot	–	❍	–	–	–	–	
Exposure Compensation		–	❍	–	❍	△	–	p. 48
Long Shutter		–	❍	–	–	–	–	p. 49
White Balance		–	❍	–(9)	–(9)	△	❍(6)	p. 51
My Colors		–	❍	–	–	△	❍(6)	p. 54
ISO Speed		❍(10)	❍	–(9)	–(9)	–	–	p. 61
Auto Rotate		❍	❍	❍	❍	△	❍	p. 62
Grid Lines		❍	❍	❍	❍	–	❍(11)	p. 36
Vert. Shutter		❍	❍	❍	❍	–	❍	p. 37

❍ Setting available (● Default setting)
△ Setting can only be selected for the first image. (▲ Default setting)
(Shaded Area):Setting is retained even when the camera power is shut off.

(1)(2)The recording pixels and frame rates for the (Movie) mode are as follows.

	Recording Pixels			Frame Rate		
	640	320	160	60	30	15
	●	❍	–	–	●	❍
	–	●	–	●	–	–
	–	–	●	–	–	●

(3) Default flash settings are as follows.
- : Auto
- : Flash Off

(4) Cannot be set in the or mode.
(5) Cannot be selected in the , or mode.
(6) Cannot be selected in the or mode.
(7) AF cannot be selected in the mode.
(8) Can only be set and used in the mode.
(9) Automatically set by the camera.
(10) or can be selected.
(11) In the mode, only [Grid Lines] can be used.

Downloaded From camera-usermanual.com Canon Manuals

Canon

© 2006 CANON INC.
Downloaded From camera-usermanual.com Canon Manuals